




SLNC新型单级离心泵

SLNC NEW TYPE SINGLE-STAGE CENTRIFUGAL PUMP

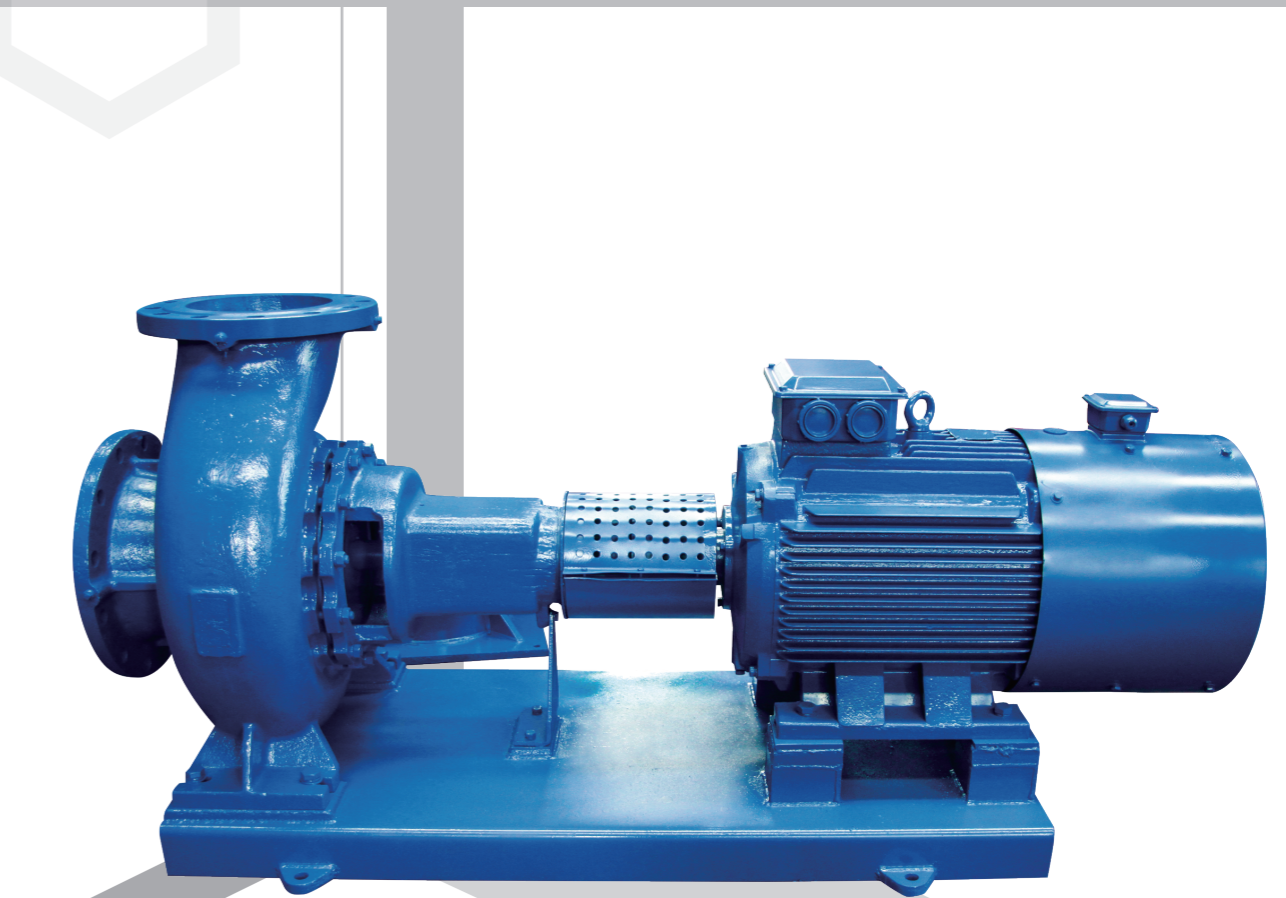

上海连成（集团）有限公司
SHANGHAI LIANCHENG (GROUP)CO.,LTD.

地址：上海市江桥镇曹安公路3616-3618号
邮编：201812
总机：(021) 59138888
传真：(021) 59136782
800免费咨询电话：800-820-5009
400免费客服电话：400-188-3339

Address:3616-3618 Can'an Road, Jiangqiao Shanghai
P.C.: 201812
Switchboard: (021) 59138888
Fax: (021) 59136782
800 Free consultation Tel: 800-820-5009
400 Free service Tel: 400-188-3339



连成集团微信订阅号

目 录

CONTENTS

| | |
|---|----|
| 概 述 Outline | 1 |
| 产品特点 Product features | 1 |
| 工作条件 The working conditions | 2 |
| 型号意义 Model meaning | 2 |
| 主要用途 The main purpose | 2 |
| 结构说明 About the structure | 3 |
| 型谱图 Spectrum diagram | 4 |
| 性能参数表 Performance parameters of the table | 5 |
| 性能曲线图 Performance curve | 21 |
| 安装尺寸图 Installation dimension drawing | 35 |
| 安装尺寸表 Installation dimension table | 36 |

概 述 Outline

SLNC系列单级单吸悬臂式离心泵参照国外知名厂家卧式离心泵，符合ISO2858要求，其性能参数是由原IS及SLW型清水离心泵性能参数优化、扩展而成，其内部结构、整体外观是集成原IS型清水离心泵及现有SLW卧式泵、悬臂式泵的优点设计而成，使其不论性能参数还是内部结构以及整体外观都更趋于合理、可靠。

产品严格按照有关要求组织生产，产品质量稳定，性能可靠，供输送清水或物理化学性质类似于清水且不含固体颗粒的液体之用。

该系列泵流量范围15-2000m³/h，扬程范围10-140m，通过切割叶轮和调整转速可以获得近200种型号的产品，能适应各行各业的输水需求，按转速可分为2950r/min、1480r/min以及980r/min，按叶轮的切割型式可分基本型、A型、B型、C型、D型。

SLNC series single-stage single-suction cantilever centrifugal pump with reference to foreign famous manufacturer horizontal centrifugal pump, conform to the requirements of the ISO2858, its performance parameters are from the original IS, says Mr Galdi at SLW type centrifugal water pump performance parameters optimization, expand and become, its internal structure, the overall appearance IS integrated the original type IS water centrifugal pump and the advantages of existing says Mr Galdi at SLW horizontal pump, cantilever type pump design, make its performance parameters and the internal structure and overall appearance are tend to be more reasonable and reliable.

Manufactured products in strict accordance with the relevant requirements, product quality is stable and reliable performance, for the transport of water and physical and chemical properties similar to water without solid particles in the liquid with.

This series of pump flow range 15-2000m³/h, 10-140m lift range, and adjust the rotation speed can be obtained by cutting impeller of nearly 200 types of products, can adapt to all walks of life water demand, according to the rotation speed can be divided into 2950r/min, 1480r/min and 980r/min, press the impeller cutting pattern can be divided into basic, type A, type B, type C and type D.

产品特点 Product features

- 1、结构紧凑。该系列泵为卧式结构，外形美观，占地面积少。
- 2、运行平稳、噪音低、组件同心度高。泵和电机采用联轴器连接，叶轮具有良好的动静平衡，运行时振动小，改善了使用环境。
- 3、无渗漏。轴封采用耐腐蚀硬质合金机械密封。
- 4、维修方便。该系列卧式泵为后开门式结构，无须拆卸管路，即可进行检修。


1. Compact structure. This series of pump is horizontal structure, beautiful shape, covering an area of less.
2. Smooth running, low noise, high concentricity components. Connected by coupling pump and motor, impeller has good dynamic and static balance, little vibration when running, improving the use environment.
3. No leakage. Shaft sealing adopts corrosion-resistant carbide mechanical seal.
4. Easy maintenance. After this series of horizontal pump is open type structure, do not need to remove the line, can be for maintenance.

工作条件 The working conditions

- 1、泵最大工作压力（最大允许进口压力+泵设计压力）<1.6MPa，订货请注明系统工作压力；
最大允许进口压力0.4MPa；
- 2、适应介质：清水介质应无腐蚀性液体、介质固体不容物，其体积不超过单位体积的0.1%，粒度<0.2mm，如介质为带有细小颗粒的请在订货时说明；
- 3、周围环境温度不超过40℃，相对湿度不超过95%；
- 4、从电机端看，泵的旋转方向为顺时针方向旋转（CW）。

1. The maximum working pressure of pump (maximum allowable inlet pressure + pump design pressure) <1.6MPa, ordering please specify the system working pressure;
Maximum allowable inlet pressure 0.4MPa;
2. Adapt to the media: the water medium should be no corrosive liquid, medium solids can not be, its volume is not more than 0.1% per unit volume, particle size less than 0.2mm, such as the medium for the small particles in the order;
3. The ambient temperature not exceeding 40℃, relative humidity of not more than 95%;
4. From the motor side, the rotation direction of the pump is clockwise rotation (CW).

型号意义 Model meaning

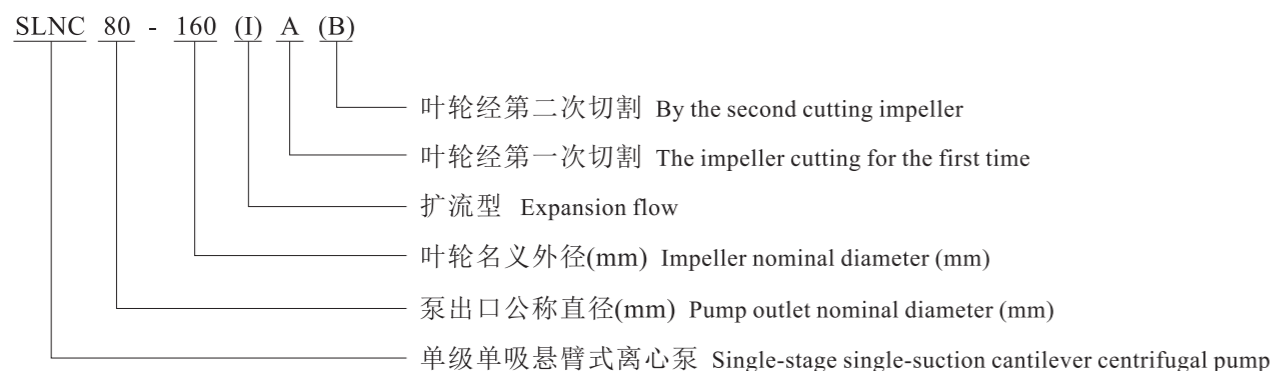

主要用途 The main purpose


SLNC单级单吸悬臂式离心泵，供输送清水或物理化学性质类似于清水且不含固体颗粒的液体之用。使用介质温度不超过100℃，适用于工业和城市给排水、高层建筑增压送水、园林喷灌、消防增压、远距离输水、采暖、浴室冷热水循环增压及设备配套等。

SLNC single-stage single-suction cantilever centrifugal pump, for the transport of water and physical and chemical properties similar to water without solid particles in the liquid with. Use of medium temperature does not exceed 100℃, applicable to industrial and urban water supply and drainage, pressurized water supply in high-rise building, garden sprinkler irrigation, fire pressurization, long distance water supply, cold and hot water circulation pressurization in heating, bathrooms and form a complete set of equipment, etc.

结构说明 About the structure




结构见下图。该泵由泵体、叶轮、泵盖、悬架体和轴等零件组成。泵为单级单吸卧式悬臂式离心泵，泵体和泵盖两部分是从叶轮背面处剖分的，即为后开门结构形式。大多数泵的叶轮前、后均设有密封环，并在叶轮后盖板上设有平衡孔，以平衡作用在转子上的轴向力。深沟球轴承承受泵的径向力和残余轴向力。传动方式可用弹性柱销联轴器，也可采用带有中间联的膜片联轴器。轴封采用知名厂家机械密封，以满足客户的使用要求。

See image below. The pump by the pump body, impeller, pump cover, such as suspension body and shaft parts. Pump for single-stage single-suction horizontal cantilever type centrifugal pump, the pump body and pump cover two parts from dissection of the impeller, which open the door for the structure. Before and after there are most of the pump impeller sealing ring, and is equipped with balance on impeller back cover hole, in order to balance the axial force on the rotor. Deep groove ball bearing radial force and residual axial force of pump. Available elastic dowel pin shaft coupling transmission way, also can be used with the diaphragm coupling of intermediate link. Shaft sealing adopts mechanical seal famous manufacturer, to meet customer demand.

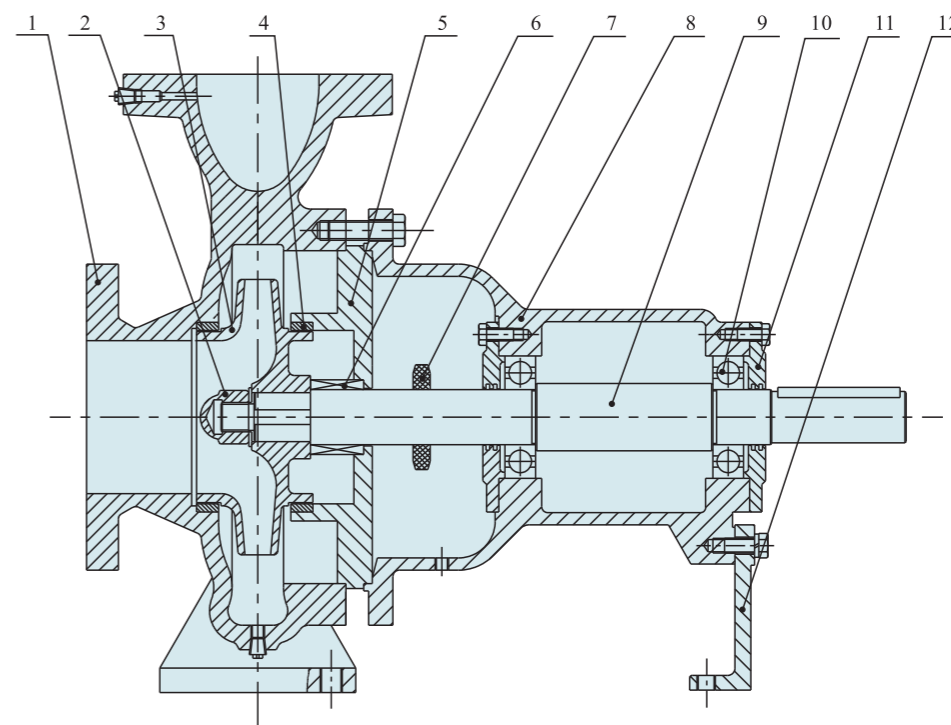

| 序号 No | 名称 Name | 常规材质 Conventional material | 序号 No | 名称 Name | 常规材质 Conventional material | 序号 No | 名称 Name | 常规材质 Conventional material |
|-------|-----------------------|----------------------------|-------|-------------------------|--------------------------------------|-------|-------------------------|----------------------------|
| 1 | 泵体 Pump body | HT200 | 5 | 泵盖 Pump cover | HT200 | 9 | 轴 Shaft | 2Cr13 |
| 2 | 叶轮螺母 The impeller nut | 45 | 6 | 机械密封 Mechanical seal | 石墨-碳化钨 Graphite and tungsten carbide | 10 | 滚动轴承 Rolling bearing | |
| 3 | 叶轮 The impeller | HT200 | 7 | 挡水圈 Against hydrosphere | 丁腈橡胶 Nitrile butadiene rubber | 11 | 轴承压盖 Bearing gland | HT200 |
| 4 | 密封环 Sealing ring | HT200 | 8 | 悬架体 The suspension body | HT200 | 12 | 悬架支架 Suspension bracket | HT200 |

型谱图 Spectrum diagram

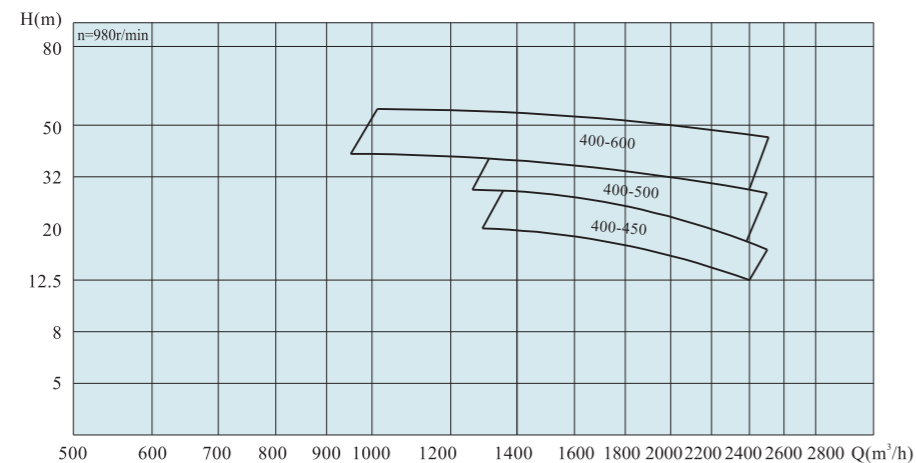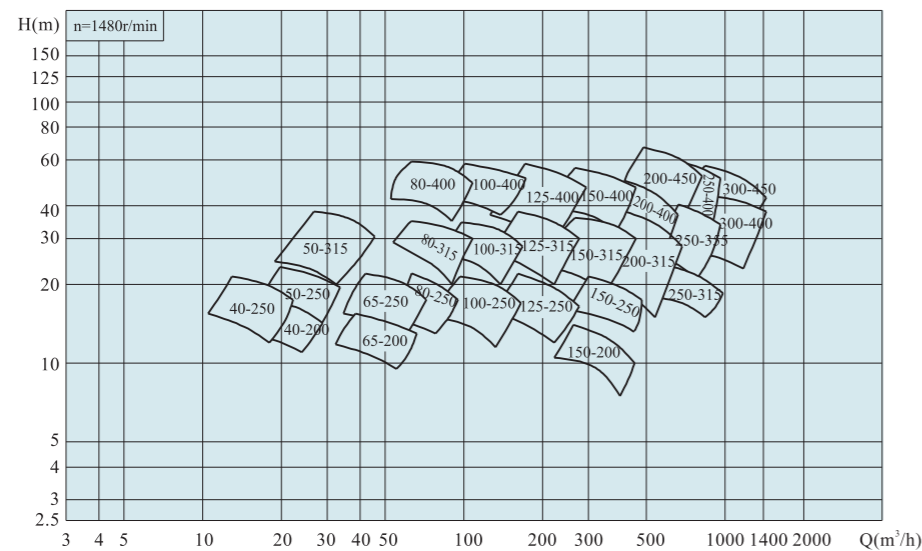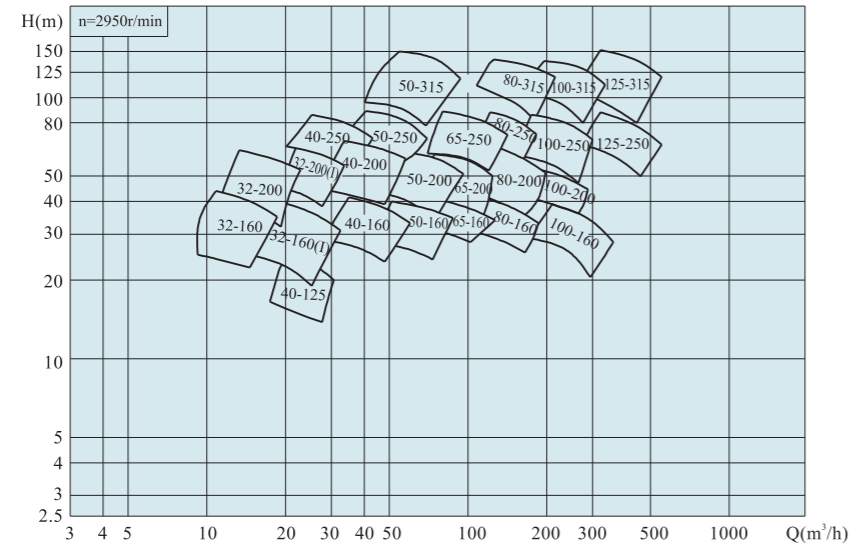

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC32-160 | 2950 | 11.2 | 3.1 | 43.2 | 46.1 | 5.5 | 4.0 | 50 | 32 | 132 |
| | | 16.0 | 4.4 | 40.0 | 52.2 | | | | | |
| | | 19.2 | 5.3 | 35.2 | 56.9 | | | | | |
| SLNC32-160A | 2950 | 9.8 | 2.7 | 37.8 | 44.4 | 4 | 4.0 | 50 | 32 | 125 |
| | | 14.0 | 3.9 | 35.0 | 51.7 | | | | | |
| | | 16.8 | 4.7 | 30.8 | 56.4 | | | | | |
| SLNC32-160B | 2950 | 8.4 | 2.3 | 29.2 | 45.0 | 2.2 | 4.0 | 50 | 32 | 101 |
| | | 12.0 | 3.3 | 27.0 | 52.5 | | | | | |
| | | 14.4 | 4.0 | 23.8 | 57.3 | | | | | |
| SLNC32-160(I) | 2950 | 15.8 | 4.4 | 32.1 | 54.9 | 4 | 5.0 | 50 | 32 | 120 |
| | | 22.5 | 6.3 | 30.0 | 61.4 | | | | | |
| | | 27.0 | 7.5 | 26.0 | 65.3 | | | | | |
| SLNC32-160(I)A | 2950 | 13.7 | 3.8 | 27.2 | 54.6 | 3 | 5.0 | 50 | 32 | 96 |
| | | 19.5 | 5.4 | 24.6 | 61.5 | | | | | |
| | | 23.4 | 6.5 | 22.2 | 64.9 | | | | | |
| SLNC32-160(I)B | 2950 | 11.9 | 3.3 | 22.5 | 54.7 | 2.2 | 4.5 | 50 | 32 | 81 |
| | | 17.0 | 4.7 | 20.8 | 61.2 | | | | | |
| | | 20.4 | 5.7 | 19.1 | 64.4 | | | | | |
| SLNC32-200 | 2950 | 14.0 | 3.9 | 58.3 | 44.2 | 7.5 | 6.0 | 50 | 32 | 175 |
| | | 20.0 | 5.6 | 54.0 | 51.8 | | | | | |
| | | 24.0 | 6.7 | 47.5 | 56.5 | | | | | |
| SLNC32-200A | 2950 | 12.6 | 3.5 | 49.7 | 44.7 | 7.5 | 5.5 | 50 | 32 | 130 |
| | | 18.0 | 5.0 | 46.0 | 52.2 | | | | | |
| | | 21.6 | 6.0 | 40.5 | 57.0 | | | | | |
| SLNC32-200B | 2950 | 11.2 | 3.1 | 41.0 | 45.5 | 5.5 | 5.5 | 50 | 32 | 127 |
| | | 16.0 | 4.4 | 38.0 | 52.9 | | | | | |
| | | 19.2 | 5.3 | 33.4 | 57.5 | | | | | |
| SLNC32-200(I) | 2950 | 19.3 | 5.3 | 64.0 | 48.7 | 11 | 4.5 | 50 | 32 | 83 |
| | | 27.5 | 7.6 | 59.0 | 55.6 | | | | | |
| | | 33.0 | 9.2 | 54.5 | 59.5 | | | | | |
| SLNC32-200(I)A | 2950 | 17.5 | 4.9 | 53.5 | 49.5 | 7.5 | 4.5 | 50 | 32 | 78 |
| | | 25.0 | 6.9 | 50.0 | 56.5 | | | | | |
| | | 30.0 | 8.3 | 46.0 | 60.2 | | | | | |
| SLNC32-200(I)B | 2950 | 16.1 | 4.5 | 47.2 | 50.0 | 7.5 | 4.5 | 50 | 32 | 73 |
| | | 23.0 | 6.4 | 44.0 | 56.9 | | | | | |
| | | 27.6 | 7.7 | 41.0 | 60.4 | | | | | |
| SLNC40-125 | 2950 | 17.5 | 4.9 | 24.3 | 60.0 | 3 | 4.5 | 65 | 40 | 145 |
| | | 25.0 | 6.9 | 22.5 | 65.6 | | | | | |
| | | 30.0 | 8.3 | 19.8 | 68.2 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC40-125A | 2950 | 16.1 | 4.5 | 18.4 | 61.6 | 2.2 | 4.5 | 65 | 40 | 112 |
| | | 23.0 | 6.4 | 17.0 | 66.1 | | | | | |
| | | 27.6 | 7.7 | 15.0 | 68.5 | | | | | |
| SLNC40-125B | 2950 | 14.7 | 4.1 | 13.0 | 63.0 | 2.2 | 4.5 | 65 | 40 | 89 |
| | | 21.0 | 5.8 | 12.0 | 66.7 | | | | | |
| | | 25.2 | 7.0 | 10.6 | 67.9 | | | | | |
| SLNC40-160 | 2950 | 29.4 | 8.2 | 32.4 | 64.2 | 7.5 | 4.0 | 65 | 40 | 170 |
| | | 42.0 | 11.7 | 30.0 | 69.1 | | | | | |
| | | 50.4 | 14.0 | 26.4 | 71.4 | | | | | |
| SLNC40-160A | 2950 | 25.9 | 7.2 | 25.4 | 65.0 | 5.5 | 4.0 | 65 | 40 | 124 |
| | | 37.0 | 10.3 | 23.5 | 69.4 | | | | | |
| | | 44.4 | 12.3 | 20.7 | 71.3 | | | | | |
| SLNC40-160B | 2950 | 22.4 | 6.2 | 22.7 | 64.2 | 4 | 4.0 | 65 | 40 | 98 |
| | | 32.0 | 8.9 | 21.0 | 68.5 | | | | | |
| | | 38.4 | 10.7 | 18.5 | 70.5 | | | | | |
| SLNC40-200 | 2950 | 33.6 | 9.3 | 61.6 | 58.1 | 18.5 | 4.0 | 65 | 40 | 188 |
| | | 48.0 | 13.3 | 57.0 | 64.2 | | | | | |
| | | 57.6 | 16.0 | 50.2 | 68.0 | | | | | |
| SLNC40-200A | 2950 | 30.8 | 8.6 | 52.4 | 59.0 | 15 | 4.0 | 65 | 40 | 173 |
| | | 44.0 | 12.2 | 48.5 | 65.2 | | | | | |
| | | 52.8 | 14.7 | 42.7 | 68.6 | | | | | |
| SLNC40-200B | 2950 | 28.0 | 7.8 | 44.3 | 59.7 | 11 | 4.0 | 65 | 40 | 168 |
| | | 40.0 | 11.1 | 41.0 | 65.8 | | | | | |
| | | 48.0 | 13.3 | 36.1 | 69.1 | | | | | |
| SLNC40-200 | 1480 | 16.8 | 4.7 | 15.1 | 53.8 | 2.2 | 3.0 | 65 | 40 | 102 |
| | | 24.0 | 6.7 | 14.0 | 60.4 | | | | | |
| | | 28.8 | 8.0 | 12.3 | 64.4 | | | | | |
| SLNC40-200A | 1480 | 15.4 | 4.3 | 13.0 | 54.4 | 1.5 | 3.0 | 65 | 40 | 89 |
| | | 22.0 | 6.1 | 12.0 | 61.1 | | | | | |
| | | 26.4 | 7.3 | 10.6 | 64.8 | | | | | |
| SLNC40-200B | 1480 | 14.0 | 3.9 | 10.8 | 55.0 | 1.5 | 3.0 | 65 | 40 | 83 |
| | | 20.0 | 5.6 | 10.0 | 61.7 | | | | | |
| | | 24.0 | 6.7 | 8.8 | 65.2 | | | | | |
| SLNC40-250 | 2950 | 25.9 | 7.2 | 82.1 | 49.8 | 18.5 | 4.5 | 65 | 40 | 252 |
| | | 37.0 | 10.3 | 76.0 | 56.6 | | | | | |
| | | 44.4 | 12.3 | 66.9 | 61.1 | | | | | |
| SLNC40-250A | 2950 | 23.8 | 6.6 | 75.6 | 49.7 | 18.5 | 4.5 | 65 | 40 | 249 |
| | | 34.0 | 9.4 | 70.0 | 56.4 | | | | | |
| | | 40.8 | 11.3 | 61.6 | 61.0 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC40-250B | 2950 | 21.7 | 6.0 | 68.0 | 49.8 | 15 | 4.5 | 65 | 40 | 235 |
| | | 31.0 | 8.6 | 63.0 | 56.5 | | | | | |
| | | 37.2 | 10.3 | 55.4 | 61.0 | | | | | |
| SLNC40-250C | 2950 | 19.6 | 5.4 | 59.4 | 50.0 | 11 | 4.5 | 65 | 40 | 220 |
| | | 28.0 | 7.8 | 55.0 | 56.9 | | | | | |
| | | 33.6 | 9.3 | 48.4 | 61.2 | | | | | |
| SLNC40-250 | 1480 | 12.6 | 3.5 | 21.6 | 47.5 | 3 | 4.5 | 65 | 40 | 157 |
| | | 18.0 | 5.0 | 20.0 | 51.4 | | | | | |
| | | 21.6 | 6.0 | 17.6 | 55.9 | | | | | |
| SLNC40-250A | 1480 | 11.9 | 3.3 | 19.4 | 45.5 | 2.2 | 4.5 | 65 | 40 | 154 |
| | | 17.0 | 4.7 | 18.0 | 51.5 | | | | | |
| | | 20.4 | 5.7 | 15.8 | 56.4 | | | | | |
| SLNC40-250B | 1480 | 11.2 | 3.1 | 16.2 | 45.7 | 2.2 | 4.5 | 65 | 40 | 152 |
| | | 16.0 | 4.4 | 15.0 | 53.0 | | | | | |
| | | 19.2 | 5.3 | 13.2 | 57.6 | | | | | |
| SLNC40-250C | 1480 | 10.5 | 2.9 | 14.0 | 46.8 | 1.5 | 4.5 | 65 | 40 | 92 |
| | | 15.0 | 4.2 | 13.0 | 54.0 | | | | | |
| | | 18.0 | 5.0 | 11.4 | 58.5 | | | | | |
| SLNC50-160 | 2950 | 42.0 | 11.7 | 37.8 | 67.2 | 15 | 8.0 | 65 | 50 | 487 |
| | | 60.0 | 16.7 | 35.0 | 71.5 | | | | | |
| | | 72.0 | 20.0 | 30.8 | 73.4 | | | | | |
| SLNC50-160A | 2950 | 37.8 | 10.5 | 33.5 | 67.1 | 11 | 6.0 | 65 | 50 | 475 |
| | | 54.0 | 15.0 | 31.0 | 71.3 | | | | | |
| | | 64.8 | 18.0 | 27.3 | 73.1 | | | | | |
| SLNC50-160B | 2950 | 35.0 | 9.7 | 27.0 | 67.9 | 7.5 | 4.5 | 65 | 50 | 437 |
| | | 50.0 | 13.9 | 25.0 | 71.6 | | | | | |
| | | 60.0 | 16.7 | 22.0 | 72.8 | | | | | |
| SLNC50-200 | 2950 | 46.2 | 12.8 | 55.1 | 64.1 | 22 | 4.5 | 65 | 50 | 235 |
| | | 66.0 | 18.3 | 51.0 | 69.4 | | | | | |
| | | 79.2 | 22.0 | 44.9 | 72.2 | | | | | |
| SLNC50-200A | 2950 | 40.6 | 11.3 | 48.6 | 64.0 | 18.5 | 4.5 | 65 | 50 | 212 |
| | | 58.0 | 16.1 | 45.0 | 69.2 | | | | | |
| | | 69.6 | 19.3 | 39.6 | 72.0 | | | | | |
| SLNC50-200B | 2950 | 37.8 | 10.5 | 41.0 | 65.0 | 15 | 4.5 | 65 | 50 | 199 |
| | | 54.0 | 15.0 | 38.0 | 69.9 | | | | | |
| | | 64.8 | 18.0 | 33.4 | 72.3 | | | | | |
| SLNC50-250 | 2950 | 40.6 | 11.3 | 82.1 | 57.0 | 30 | 4.5 | 65 | 50 | 379 |
| | | 58.0 | 16.1 | 76.0 | 63.0 | | | | | |
| | | 69.6 | 19.3 | 66.9 | 67.2 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC50-250A | 2950 | 37.8 | 10.5 | 69.1 | 58.3 | 22 | 4.5 | 65 | 50 | 307 |
| | | 54.0 | 15.0 | 64.0 | 64.2 | | | | | |
| | | 64.8 | 18.0 | 56.3 | 68.2 | | | | | |
| SLNC50-250B | 2950 | 35.0 | 9.7 | 56.2 | 59.9 | 15 | 4.5 | 65 | 50 | 245 |
| | | 50.0 | 13.9 | 52.0 | 66.0 | | | | | |
| | | 60.0 | 16.7 | 45.8 | 69.4 | | | | | |
| SLNC50-250C | 2950 | 32.2 | 8.9 | 46.4 | 61.1 | 11 | 4.5 | 65 | 50 | 230 |
| | | 46.0 | 12.8 | 43.0 | 67.0 | | | | | |
| | | 55.2 | 15.3 | 37.8 | 70.1 | | | | | |
| SLNC50-250 | 1480 | 19.6 | 5.4 | 21.6 | 57.1 | 4 | 4.5 | 65 | 50 | 178 |
| | | 28.0 | 7.8 | 20.0 | 63.0 | | | | | |
| | | 33.6 | 9.3 | 17.6 | 62.4 | | | | | |
| SLNC50-250A | 1480 | 18.9 | 5.3 | 17.3 | 56.7 | 3 | 4.5 | 65 | 50 | 153 |
| | | 27.0 | 7.5 | 16.0 | 62.3 | | | | | |
| | | 32.4 | 9.0 | 14.1 | 64.5 | | | | | |
| SLNC50-250B | 1480 | 18.2 | 5.1 | 14.0 | 56.0 | 2.2 | 4.5 | 65 | 50 | 137 |
| | | 26.0 | 7.2 | 13.0 | 62.5 | | | | | |
| | | 31.2 | 8.7 | 11.4 | 66.2 | | | | | |
| SLNC50-250C | 1480 | 17.5 | 4.9 | 10.8 | 58.8 | 2.2 | 4.5 | 65 | 50 | 132 |
| | | 25.0 | 6.9 | 10.0 | 64.7 | | | | | |
| | | 30.0 | 8.3 | 8.8 | 67.7 | | | | | |
| SLNC50-315 | 2950 | 53.2 | 14.8 | 140.4 | 53.0 | 75 | 6.0 | 65 | 50 | 684 |
| | | 76.0 | 21.1 | 130.0 | 59.4 | | | | | |
| | | 91.2 | 25.3 | 114.4 | 63.7 | | | | | |
| SLNC50-315A | 2950 | 49.0 | 13.6 | 125.3 | 53.5 | 55 | 6.0 | 65 | 50 | 563 |
| | | 70.0 | 19.4 | 116.0 | 59.9 | | | | | |
| | | 84.0 | 23.3 | 102.1 | 64.1 | | | | | |
| SLNC50-315B | 2950 | 45.5 | 12.6 | 108.0 | 54.7 | 45 | 6.0 | 65 | 50 | 437 |
| | | 65.0 | 18.1 | 100.0 | 61.0 | | | | | |
| | | 78.0 | 21.7 | 88.0 | 64.9 | | | | | |
| SLNC50-315C | 2950 | 42.0 | 11.7 | 97.2 | 55.1 | 45 | 6.0 | 65 | 50 | 435 |
| | | 60.0 | 16.7 | 90.0 | 61.3 | | | | | |
| | | 72.0 | 20.0 | 79.2 | 65.3 | | | | | |
| SLNC50-315D | 2950 | 39.2 | 10.9 | 84.2 | 56.1 | 30 | 6.0 | 65 | 50 | 402 |
| | | 56.0 | 15.6 | 78.0 | 62.3 | | | | | |
| | | 67.2 | 18.7 | 68.6 | 66.3 | | | | | |
| SLNC50-315 | 1480 | 26.6 | 7.4 | 34.6 | 49.3 | 7.5 | 5.5 | 65 | 50 | 222 |
| | | 38.0 | 10.6 | 32.0 | 56.3 | | | | | |
| | | 45.6 | 12.7 | 28.2 | 60.8 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC50-315A | 1480 | 24.5 | 6.8 | 29.2 | 50.7 | 7.5 | 5.5 | 65 | 50 | 222 |
| | | 35.0 | 9.7 | 27.0 | 57.4 | | | | | |
| | | 42.0 | 11.7 | 23.8 | 61.8 | | | | | |
| SLNC50-315B | 1480 | 22.4 | 6.2 | 25.9 | 50.9 | 7.5 | 5.5 | 65 | 50 | 222 |
| | | 32.0 | 8.9 | 24.0 | 57.6 | | | | | |
| | | 38.4 | 10.7 | 21.1 | 62.0 | | | | | |
| SLNC50-315C | 1480 | 21.0 | 5.8 | 23.2 | 51.5 | 5.5 | 5.5 | 65 | 50 | 222 |
| | | 30.0 | 8.3 | 21.5 | 58.3 | | | | | |
| | | 36.0 | 10.0 | 18.9 | 62.5 | | | | | |
| SLNC50-315D | 1480 | 18.9 | 5.3 | 20.5 | 51.5 | 5.5 | 5.5 | 65 | 50 | 208 |
| | | 27.0 | 7.5 | 19.0 | 58.3 | | | | | |
| | | 32.4 | 9.0 | 16.7 | 62.5 | | | | | |
| SLNC65-160 | 2950 | 56.0 | 15.6 | 40.0 | 69.9 | 18.5 | 4.0 | 80 | 65 | 225 |
| | | 80.0 | 22.2 | 37.0 | 73.3 | | | | | |
| | | 96.0 | 26.7 | 32.6 | 74.8 | | | | | |
| SLNC65-160A | 2950 | 52.5 | 14.6 | 32.4 | 70.7 | 15 | 4.0 | 80 | 65 | 223 |
| | | 75.0 | 20.8 | 30.0 | 73.8 | | | | | |
| | | 90.0 | 25.0 | 26.4 | 74.6 | | | | | |
| SLNC65-160B | 2950 | 49.0 | 13.6 | 25.9 | 71.3 | 11 | 4.0 | 80 | 65 | 211 |
| | | 70.0 | 19.4 | 24.0 | 73.5 | | | | | |
| | | 84.0 | 23.3 | 21.1 | 74.2 | | | | | |
| SLNC65-200 | 2950 | 70.0 | 19.4 | 54.0 | 69.6 | 30 | 4.0 | 80 | 65 | 285 |
| | | 100.0 | 27.8 | 50.0 | 73.5 | | | | | |
| | | 120.0 | 33.3 | 44.0 | 75.5 | | | | | |
| SLNC65-200A | 2950 | 66.5 | 18.5 | 46.4 | 70.4 | 22 | 4.0 | 80 | 65 | 282 |
| | | 95.0 | 26.4 | 43.0 | 74.0 | | | | | |
| | | 114.0 | 31.7 | 37.8 | 75.5 | | | | | |
| SLNC65-200B | 2950 | 63.0 | 17.5 | 35.6 | 71.8 | 15 | 4.0 | 80 | 65 | 251 |
| | | 90.0 | 25.0 | 33.0 | 74.6 | | | | | |
| | | 108.0 | 30.0 | 29.0 | 75.3 | | | | | |
| SLNC65-200 | 1480 | 38.5 | 10.7 | 13.0 | 67.6 | 4 | 4.0 | 80 | 65 | 157 |
| | | 55.0 | 15.3 | 12.0 | 71.5 | | | | | |
| | | 66.0 | 18.3 | 10.6 | 73.2 | | | | | |
| SLNC65-200A | 1480 | 35.0 | 9.7 | 10.8 | 67.8 | 3 | 4.0 | 80 | 65 | 142 |
| | | 50.0 | 13.9 | 10.0 | 71.6 | | | | | |
| | | 60.0 | 16.7 | 8.8 | 72.8 | | | | | |
| SLNC65-200B | 1480 | 31.5 | 8.8 | 9.2 | 67.8 | 2.2 | 4.0 | 80 | 65 | 138 |
| | | 45.0 | 12.5 | 8.5 | 71.4 | | | | | |
| | | 54.0 | 15.0 | 7.5 | 72.3 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC65-250 | 2950 | 73.5 | 20.4 | 86.4 | 64.5 | 45 | 5.0 | 80 | 65 | 518 |
| | | 105.0 | 29.2 | 80.0 | 69.9 | | | | | |
| | | 126.0 | 35.0 | 70.4 | 73.1 | | | | | |
| SLNC65-250A | 2950 | 70.0 | 19.4 | 71.3 | 66.4 | 37 | 5.0 | 80 | 65 | 460 |
| | | 100.0 | 27.8 | 66.0 | 71.4 | | | | | |
| | | 120.0 | 33.3 | 58.1 | 74.1 | | | | | |
| SLNC65-250B | 2950 | 67.9 | 18.9 | 58.3 | 68.4 | 30 | 4.5 | 80 | 65 | 385 |
| | | 97.0 | 26.9 | 54.0 | 72.8 | | | | | |
| | | 116.4 | 32.3 | 47.5 | 74.9 | | | | | |
| SLNC65-250C | 2950 | 66.5 | 18.5 | 46.4 | 70.4 | 30 | 4.5 | 80 | 65 | 375 |
| | | 95.0 | 26.4 | 43.0 | 74.0 | | | | | |
| | | 114.0 | 31.7 | 37.8 | 75.5 | | | | | |
| SLNC65-250 | 1480 | 37.8 | 10.5 | 21.6 | 61.5 | 5.5 | 4.0 | 80 | 65 | 291 |
| | | 54.0 | 15.0 | 20.0 | 67.3 | | | | | |
| | | 64.8 | 18.0 | 17.6 | 70.5 | | | | | |
| SLNC65-250A | 1480 | 35.0 | 9.7 | 18.4 | 62.4 | 5.5 | 4.0 | 80 | 65 | 291 |
| | | 50.0 | 13.9 | 17.0 | 68.1 | | | | | |
| | | 60.0 | 16.7 | 15.0 | 70.9 | | | | | |
| SLNC65-250B | 1480 | 33.6 | 9.3 | 15.1 | 64.3 | 4 | 4.0 | 80 | 65 | 275 |
| | | 48.0 | 13.3 | 14.0 | 69.3 | | | | | |
| | | 57.6 | 16.0 | 12.3 | 71.8 | | | | | |
| SLNC65-250C | 1480 | 32.9 | 9.1 | 11.9 | 66.4 | 3 | 4.0 | 80 | 65 | 237 |
| | | 47.0 | 13.1 | 11.0 | 70.7 | | | | | |
| | | 56.4 | 15.7 | 9.7 | 72.5 | | | | | |
| SLNC80-160 | 2950 | 101.5 | 28.2 | 38.9 | 74.9 | 22 | 5.5 | 100 | 80 | 295 |
| | | 145.0 | 40.3 | 36.0 | 76.6 | | | | | |
| | | 174.0 | 48.3 | 31.7 | 77.3 | | | | | |
| SLNC80-160A | 2950 | 95.9 | 26.6 | 32.4 | 74.8 | 18.5 | 5.5 | 100 | 80 | 252 |
| | | 137.0 | 38.1 | 30.0 | 76.5 | | | | | |
| | | 164.4 | 45.7 | 26.4 | 77.1 | | | | | |
| SLNC80-160B | 2950 | 89.6 | 24.9 | 25.9 | 74.6 | 15 | 5.5 | 100 | 80 | 237 |
| | | 128.0 | 35.6 | 24.0 | 76.0 | | | | | |
| | | 153.6 | 42.7 | 21.1 | 76.3 | | | | | |
| SLNC80-200 | 2950 | 115.5 | 32.1 | 62.6 | 73.2 | 45 | 5.5 | 100 | 80 | 410 |
| | | 165.0 | 45.8 | 58.0 | 76.6 | | | | | |
| | | 198.0 | 55.0 | 51.0 | 77.8 | | | | | |
| SLNC80-200A | 2950 | 108.5 | 30.1 | 52.9 | 73.8 | 37 | 5.5 | 100 | 80 | 389 |
| | | 155.0 | 43.1 | 49.0 | 76.9 | | | | | |
| | | 186.0 | 51.7 | 43.1 | 77.5 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC80-200B | 2950 | 101.5 | 28.2 | 45.4 | 74.2 | 30 | 5.5 | 100 | 80 | 386 |
| | | 145.0 | 40.3 | 42.0 | 76.6 | | | | | |
| | | 174.0 | 48.3 | 37.0 | 77.3 | | | | | |
| SLNC80-250 | 2950 | 112.0 | 31.1 | 81.0 | 70.5 | 55 | 5.5 | 100 | 80 | 616 |
| | | 160.0 | 44.4 | 75.0 | 74.9 | | | | | |
| | | 192.0 | 53.3 | 66.0 | 77.0 | | | | | |
| SLNC80-250A | 2950 | 105.0 | 29.2 | 69.1 | 71.5 | 45 | 5.5 | 100 | 80 | 486 |
| | | 150.0 | 41.7 | 64.0 | 75.5 | | | | | |
| | | 180.0 | 50.0 | 56.3 | 77.3 | | | | | |
| SLNC80-250B | 2950 | 98.0 | 27.2 | 61.6 | 71.8 | 37 | 5.5 | 100 | 80 | 445 |
| | | 140.0 | 38.9 | 57.0 | 75.6 | | | | | |
| | | 168.0 | 46.7 | 50.2 | 77.2 | | | | | |
| SLNC80-250C | 2950 | 91.0 | 25.3 | 56.2 | 71.9 | 37 | 5.5 | 100 | 80 | 445 |
| | | 130.0 | 36.1 | 52.0 | 75.4 | | | | | |
| | | 156.0 | 43.3 | 45.8 | 76.9 | | | | | |
| SLNC80-250 | 1480 | 56.0 | 15.6 | 19.4 | 68.0 | 7.5 | 4.0 | 100 | 80 | 282 |
| | | 80.0 | 22.2 | 18.0 | 72.2 | | | | | |
| | | 96.0 | 26.7 | 15.8 | 74.4 | | | | | |
| SLNC80-250A | 1480 | 52.5 | 14.6 | 17.3 | 68.4 | 5.5 | 4.0 | 100 | 80 | 265 |
| | | 75.0 | 20.8 | 16.0 | 72.5 | | | | | |
| | | 90.0 | 25.0 | 14.1 | 74.5 | | | | | |
| SLNC80-250B | 1480 | 49.0 | 13.6 | 15.1 | 68.9 | 5.5 | 4.0 | 100 | 80 | 267 |
| | | 70.0 | 19.4 | 14.0 | 72.7 | | | | | |
| | | 84.0 | 23.3 | 12.3 | 74.2 | | | | | |
| SLNC80-250C | 1480 | 45.5 | 12.6 | 13.0 | 69.3 | 4 | 4.0 | 100 | 80 | 239 |
| | | 65.0 | 18.1 | 12.0 | 72.8 | | | | | |
| | | 78.0 | 21.7 | 10.6 | 73.9 | | | | | |
| SLNC80-315 | 2950 | 126.0 | 35.0 | 140.4 | 65.2 | 110 | 6.0 | 100 | 80 | 1123 |
| | | 180.0 | 50.0 | 130.0 | 70.7 | | | | | |
| | | 216.0 | 60.0 | 114.4 | 74.1 | | | | | |
| SLNC80-315A | 2950 | 119.0 | 33.1 | 122.0 | 66.2 | 90 | 6.0 | 100 | 80 | 760 |
| | | 170.0 | 47.2 | 113.0 | 71.7 | | | | | |
| | | 204.0 | 56.7 | 99.4 | 74.8 | | | | | |
| SLNC80-315B | 2950 | 112.0 | 31.1 | 104.8 | 67.3 | 75 | 6.0 | 100 | 80 | 737 |
| | | 160.0 | 44.4 | 97.0 | 72.7 | | | | | |
| | | 192.0 | 53.3 | 85.4 | 75.5 | | | | | |
| SLNC80-315C | 2950 | 105.0 | 29.2 | 97.2 | 67.5 | 75 | 5.5 | 100 | 80 | 735 |
| | | 150.0 | 41.7 | 90.0 | 72.8 | | | | | |
| | | 180.0 | 50.0 | 79.2 | 75.5 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC80-315D | 2950 | 98.0 | 27.2 | 88.6 | 67.9 | 55 | 5.5 | 100 | 80 | 670 |
| | | 140.0 | 38.9 | 82.0 | 72.9 | | | | | |
| | | 168.0 | 46.7 | 72.2 | 75.6 | | | | | |
| SLNC80-315 | 1480 | 63.0 | 17.5 | 35.1 | 62.9 | 15 | 4.5 | 100 | 80 | 346 |
| | | 90.0 | 25.0 | 32.5 | 69.5 | | | | | |
| | | 108.0 | 30.0 | 28.6 | 71.4 | | | | | |
| SLNC80-315A | 1480 | 59.5 | 16.5 | 30.2 | 63.4 | 11 | 4.5 | 100 | 80 | 344 |
| | | 85.0 | 23.6 | 28.0 | 69.1 | | | | | |
| | | 102.0 | 28.3 | 24.6 | 72.2 | | | | | |
| SLNC80-315B | 1480 | 56.0 | 15.6 | 24.8 | 65.1 | 11 | 4.5 | 100 | 80 | 341 |
| | | 80.0 | 22.2 | 23.0 | 70.3 | | | | | |
| | | 96.0 | 26.7 | 20.2 | 73.1 | | | | | |
| SLNC80-315C | 1480 | 52.5 | 14.6 | 22.7 | 65.4 | 7.5 | 4.5 | 100 | 80 | 243 |
| | | 75.0 | 20.8 | 21.0 | 70.5 | | | | | |
| | | 90.0 | 25.0 | 18.5 | 73.2 | | | | | |
| SLNC80-315D | 1480 | 49.0 | 13.6 | 20.5 | 65.9 | 7.5 | 4.5 | 100 | 80 | 230 |
| | | 70.0 | 19.4 | 19.0 | 70.7 | | | | | |
| | | 84.0 | 23.3 | 16.7 | 73.2 | | | | | |
| SLNC80-400 | 1480 | 70.0 | 19.4 | 60.5 | 57.3 | 30 | 5.0 | 100 | 80 | 523 |
| | | 100.0 | 27.8 | 56.0 | 63.5 | | | | | |
| | | 120.0 | 33.3 | 49.3 | 66.1 | | | | | |
| SLNC80-400A | 1480 | 65.8 | 18.3 | 55.1 | 56.8 | 30 | 5.0 | 100 | 80 | 515 |
| | | 94.0 | 26.1 | 51.0 | 62.6 | | | | | |
| | | 112.8 | 31.3 | 44.9 | 66.5 | | | | | |
| SLNC80-400B | 1480 | 61.6 | 17.1 | 49.7 | 57.0 | 22 | 5.0 | 100 | 80 | 446 |
| | | 88.0 | 24.4 | 46.0 | 63.1 | | | | | |
| | | 105.6 | 29.3 | 40.5 | 67.0 | | | | | |
| SLNC80-400C | 1480 | 58.8 | 16.3 | 44.3 | 58.1 | 18.5 | 5.0 | 100 | 80 | 420 |
| | | 84.0 | 23.3 | 41.0 | 64.0 | | | | | |
| | | 100.8 | 28.0 | 36.1 | 67.9 | | | | | |
| SLNC80-400D | 1480 | 56.0 | 15.6 | 41.0 | 58.4 | 18.5 | 5.0 | 100 | 80 | 380 |
| | | 80.0 | 22.2 | 38.0 | 64.3 | | | | | |
| | | 96.0 | 26.7 | 33.4 | 68.4 | | | | | |
| SLNC100-160 | 2950 | 140.0 | 38.9 | 32.4 | 76.4 | 30 | 5.0 | 125 | 100 | 405 |
| | | 200.0 | 55.6 | 30.0 | 77.8 | | | | | |
| | | 240.0 | 66.7 | 26.4 | 77.3 | | | | | |
| SLNC100-160A | 2950 | 133.0 | 36.9 | 28.1 | 76.2 | 30 | 5.0 | 125 | 100 | 403 |
| | | 190.0 | 52.8 | 26.0 | 77.5 | | | | | |
| | | 228.0 | 63.3 | 22.9 | 76.5 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC100-160B | 2950 | 126.0 | 35.0 | 22.7 | 75.9 | 22 | 5.0 | 125 | 100 | 516 |
| | | 180.0 | 50.0 | 21.0 | 76.2 | | | | | |
| | | 216.0 | 60.0 | 18.5 | 75.1 | | | | | |
| SLNC100-200 | 2950 | 164.5 | 45.7 | 54.0 | 76.9 | 55 | 6.0 | 125 | 100 | 557 |
| | | 235.0 | 65.3 | 50.0 | 78.2 | | | | | |
| | | 282.0 | 78.3 | 44.0 | 78.8 | | | | | |
| SLNC100-200A | 2950 | 157.5 | 43.8 | 46.4 | 77.0 | 45 | 5.0 | 125 | 100 | 494 |
| | | 225.0 | 62.5 | 43.0 | 78.1 | | | | | |
| | | 270.0 | 75.0 | 37.8 | 78.6 | | | | | |
| SLNC100-200B | 2950 | 150.5 | 41.8 | 38.9 | 76.8 | 37 | 5.0 | 125 | 100 | 435 |
| | | 215.0 | 59.7 | 36.0 | 78.0 | | | | | |
| | | 258.0 | 71.7 | 31.7 | 78.3 | | | | | |
| SLNC100-250 | 2950 | 175.0 | 48.6 | 83.2 | 74.9 | 90 | 6.0 | 125 | 100 | 784 |
| | | 250.0 | 69.4 | 77.0 | 77.9 | | | | | |
| | | 300.0 | 83.3 | 67.8 | 79.0 | | | | | |
| SLNC100-250A | 2950 | 168.0 | 46.7 | 75.6 | 75.2 | 75 | 6.0 | 125 | 100 | 740 |
| | | 240.0 | 66.7 | 70.0 | 78.0 | | | | | |
| | | 288.0 | 80.0 | 61.6 | 78.9 | | | | | |
| SLNC100-250B | 2950 | 161.0 | 44.7 | 61.6 | 76.2 | 55 | 5.5 | 125 | 100 | 630 |
| | | 230.0 | 63.9 | 57.0 | 78.2 | | | | | |
| | | 276.0 | 76.7 | 50.2 | 78.7 | | | | | |
| SLNC100-250C | 2950 | 154.0 | 42.8 | 49.7 | 76.8 | 55 | 5.5 | 125 | 100 | 628 |
| | | 220.0 | 61.1 | 46.0 | 78.0 | | | | | |
| | | 264.0 | 73.3 | 40.5 | 78.6 | | | | | |
| SLNC100-250 | 1480 | 96.6 | 26.8 | 20.5 | 74.3 | 11 | 5.5 | 125 | 100 | 276 |
| | | 138.0 | 38.3 | 19.0 | 77.8 | | | | | |
| | | 165.6 | 46.0 | 16.7 | 77.1 | | | | | |
| SLNC100-250A | 1480 | 89.6 | 24.9 | 17.8 | 73.4 | 11 | 5.5 | 125 | 100 | 276 |
| | | 128.0 | 35.6 | 16.5 | 76.7 | | | | | |
| | | 153.6 | 42.7 | 14.5 | 76.9 | | | | | |
| SLNC100-250B | 1480 | 82.6 | 22.9 | 15.1 | 73.5 | 7.5 | 5.5 | 125 | 100 | 276 |
| | | 118.0 | 32.8 | 14.0 | 75.6 | | | | | |
| | | 141.6 | 39.3 | 12.3 | 76.5 | | | | | |
| SLNC100-250C | 1480 | 77.0 | 21.4 | 11.2 | 73.9 | 5.5 | 5.5 | 125 | 100 | 227 |
| | | 100.0 | 27.8 | 10.0 | 75.0 | | | | | |
| | | 120.0 | 33.3 | 9.0 | 75.7 | | | | | |
| SLNC100-315 | 2950 | 196.0 | 54.4 | 118.8 | 72.7 | 160 | 6.5 | 125 | 100 | 1334 |
| | | 280.0 | 77.8 | 110.0 | 76.6 | | | | | |
| | | 336.0 | 93.3 | 96.8 | 78.7 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC100-315A | 2950 | 182.0 | 50.6 | 108.0 | 72.9 | 132 | 5.5 | 125 | 100 | 1247 |
| | | 260.0 | 72.2 | 100.0 | 76.7 | | | | | |
| | | 312.0 | 86.7 | 88.0 | 78.6 | | | | | |
| SLNC100-315B | 2950 | 175.0 | 48.6 | 91.8 | 74.1 | 110 | 5.5 | 125 | 100 | 1210 |
| | | 250.0 | 69.4 | 85.0 | 77.5 | | | | | |
| | | 300.0 | 83.3 | 74.8 | 79.0 | | | | | |
| SLNC100-315C | 2950 | 168.0 | 46.7 | 85.3 | 74.4 | 110 | 5.0 | 125 | 100 | 1213 |
| | | 240.0 | 66.7 | 79.0 | 77.5 | | | | | |
| | | 288.0 | 80.0 | 69.5 | 78.9 | | | | | |
| SLNC100-315D | 2950 | 161.0 | 44.7 | 78.8 | 74.6 | 90 | 5.0 | 125 | 100 | 835 |
| | | 230.0 | 63.9 | 73.0 | 77.6 | | | | | |
| | | 276.0 | 76.7 | 64.2 | 78.7 | | | | | |
| SLNC100-315 | 1480 | 98.0 | 27.2 | 31.3 | 69.4 | 18.5 | 5.5 | 125 | 100 | 413 |
| | | 140.0 | 38.9 | 29.0 | 74.0 | | | | | |
| | | 168.0 | 46.7 | 25.5 | 76.3 | | | | | |
| SLNC100-315A | 1480 | 91.0 | 25.3 | 28.1 | 69.7 | 18.5 | 5.5 | 125 | 100 | 413 |
| | | 130.0 | 36.1 | 26.0 | 74.0 | | | | | |
| | | 156.0 | 43.3 | 22.9 | 76.3 | | | | | |
| SLNC100-315B | 1480 | 87.5 | 24.3 | 24.8 | 70.6 | 15 | 5.5 | 125 | 100 | 382 |
| | | 125.0 | 34.7 | 23.0 | 74.5 | | | | | |
| | | 150.0 | 41.7 | 20.2 | 76.6 | | | | | |
| SLNC100-315C | 1480 | 84.0 | 23.3 | 22.7 | 70.9 | 15 | 5.0 | 125 | 100 | 382 |
| | | 120.0 | 33.3 | 21.0 | 74.7 | | | | | |
| | | 144.0 | 40.0 | 18.5 | 76.6 | | | | | |
| SLNC100-315D | 1480 | 80.5 | 22.4 | 20.5 | 71.4 | 15 | 5.0 | 125 | 100 | 382 |
| | | 115.0 | 31.9 | 19.0 | 74.8 | | | | | |
| | | 138.0 | 38.3 | 16.7 | 76.4 | | | | | |
| SLNC100-400 | 1480 | 100.8 | 28.0 | 58.3 | 65.0 | 37 | 5.5 | 125 | 100 | 560 |
| | | 144.0 | 40.0 | 54.0 | 70.9 | | | | | |
| | | 172.8 | 48.0 | 47.5 | 71.3 | | | | | |
| SLNC100-400A | 1480 | 94.5 | 26.3 | 51.8 | 65.0 | 30 | 5.5 | 125 | 100 | 555 |
| | | 135.0 | 37.5 | 48.0 | 69.9 | | | | | |
| | | 162.0 | 45.0 | 42.2 | 71.9 | | | | | |
| SLNC100-400B | 1480 | 91.0 | 25.3 | 47.5 | 63.1 | 30 | 5.5 | 125 | 100 | 513 |
| | | 130.0 | 36.1 | 44.0 | 68.6 | | | | | |
| | | 156.0 | 43.3 | 38.7 | 72.4 | | | | | |
| SLNC100-400C | 1480 | 84.0 | 23.3 | 43.2 | 63.3 | 22 | 5.0 | 125 | 100 | 480 |
| | | 120.0 | 33.3 | 40.0 | 68.8 | | | | | |
| | | 144.0 | 40.0 | 35.2 | 72.5 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC100-400D | 1480 | 80.5 | 22.4 | 38.9 | 64.1 | 22 | 5.0 | 125 | 100 | 470 |
| | | 115.0 | 31.9 | 36.0 | 69.7 | | | | | |
| | | 138.0 | 38.3 | 31.7 | 73.0 | | | | | |
| SLNC125-250 | 2950 | 280.0 | 77.8 | 70.2 | 78.8 | 110 | 5.5 | 150 | 125 | 1231 |
| | | 400.0 | 111.1 | 65.0 | 80.0 | | | | | |
| | | 480.0 | 133.3 | 57.2 | 80.6 | | | | | |
| SLNC125-250A | 2950 | 259.0 | 71.9 | 67.0 | 78.5 | 110 | 5.5 | 150 | 125 | 1229 |
| | | 370.0 | 102.8 | 62.0 | 79.7 | | | | | |
| | | 444.0 | 123.3 | 54.6 | 80.3 | | | | | |
| SLNC125-250B | 2950 | 231.0 | 64.2 | 59.4 | 78.2 | 90 | 5.5 | 150 | 125 | 886 |
| | | 330.0 | 91.7 | 55.0 | 79.3 | | | | | |
| | | 396.0 | 110.0 | 48.4 | 80.0 | | | | | |
| SLNC125-250C | 2950 | 210.0 | 58.3 | 54.0 | 77.9 | 75 | 5.5 | 150 | 125 | 839 |
| | | 300.0 | 83.3 | 50.0 | 79.0 | | | | | |
| | | 360.0 | 100.0 | 44.0 | 79.6 | | | | | |
| SLNC125-250 | 1480 | 150.5 | 41.8 | 17.3 | 76.8 | 15 | 4.0 | 150 | 125 | 425 |
| | | 215.0 | 59.7 | 16.0 | 78.0 | | | | | |
| | | 258.0 | 71.7 | 14.1 | 78.5 | | | | | |
| SLNC125-250A | 1480 | 143.5 | 39.9 | 15.1 | 76.6 | 15 | 4.0 | 150 | 125 | 423 |
| | | 205.0 | 56.9 | 14.0 | 77.9 | | | | | |
| | | 246.0 | 68.3 | 12.3 | 78.2 | | | | | |
| SLNC125-250B | 1480 | 133.0 | 36.9 | 14.0 | 76.2 | 11 | 4.0 | 150 | 125 | 400 |
| | | 190.0 | 52.8 | 13.0 | 77.6 | | | | | |
| | | 228.0 | 63.3 | 11.4 | 77.9 | | | | | |
| SLNC125-250C | 1480 | 126.0 | 35.0 | 11.9 | 75.9 | 11 | 4.0 | 150 | 125 | 380 |
| | | 180.0 | 50.0 | 11.0 | 77.4 | | | | | |
| | | 216.0 | 60.0 | 9.7 | 77.0 | | | | | |
| SLNC125-315 | 1480 | 161.0 | 44.7 | 33.5 | 74.1 | 30 | 3.5 | 150 | 125 | 522 |
| | | 230.0 | 63.9 | 31.0 | 77.4 | | | | | |
| | | 276.0 | 76.7 | 27.3 | 78.7 | | | | | |
| SLNC125-315A | 1480 | 154.0 | 42.8 | 29.2 | 74.8 | 30 | 3.5 | 150 | 125 | 520 |
| | | 220.0 | 61.1 | 27.0 | 78.9 | | | | | |
| | | 264.0 | 73.3 | 23.8 | 78.6 | | | | | |
| SLNC125-315B | 1480 | 143.5 | 39.9 | 25.9 | 75.0 | 22 | 3.5 | 150 | 125 | 467 |
| | | 205.0 | 56.9 | 24.0 | 77.8 | | | | | |
| | | 246.0 | 68.3 | 21.1 | 78.4 | | | | | |
| SLNC125-315C | 1480 | 136.5 | 37.9 | 23.8 | 75.1 | 18.5 | 3.5 | 150 | 125 | 479 |
| | | 195.0 | 54.2 | 22.0 | 77.7 | | | | | |
| | | 234.0 | 65.0 | 19.4 | 78.2 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC125-315D | 1480 | 129.5 | 36.0 | 22.7 | 74.9 | 18.5 | 3.5 | 150 | 125 | 475 |
| | | 185.0 | 51.4 | 21.0 | 77.5 | | | | | |
| | | 222.0 | 61.7 | 18.5 | 78.1 | | | | | |
| SLNC125-400 | 1480 | 171.5 | 47.6 | 56.2 | 72.5 | 55 | 3.5 | 150 | 125 | 758 |
| | | 245.0 | 68.1 | 52.0 | 77.4 | | | | | |
| | | 294.0 | 81.7 | 45.8 | 76.7 | | | | | |
| SLNC125-400A | 1480 | 162.4 | 45.1 | 51.8 | 71.5 | 55 | 3.5 | 150 | 125 | 756 |
| | | 232.0 | 64.4 | 48.0 | 75.5 | | | | | |
| | | 278.4 | 77.3 | 42.2 | 76.8 | | | | | |
| SLNC125-400B | 1480 | 154.0 | 42.8 | 46.4 | 70.5 | 45 | 3.5 | 150 | 125 | 662 |
| | | 220.0 | 61.1 | 43.0 | 74.8 | | | | | |
| | | 264.0 | 73.3 | 37.8 | 77.2 | | | | | |
| SLNC125-400C | 1480 | 140.0 | 38.9 | 41.0 | 70.6 | 37 | 3.5 | 150 | 125 | 615 |
| | | 200.0 | 55.6 | 38.0 | 75.0 | | | | | |
| | | 240.0 | 66.7 | 33.4 | 77.3 | | | | | |
| SLNC125-400D | 1480 | 126.0 | 35.0 | 34.6 | 71.1 | 30 | 3.5 | 150 | 125 | 602 |
| | | 180.0 | 50.0 | 32.0 | 75.4 | | | | | |
| | | 216.0 | 60.0 | 28.2 | 77.4 | | | | | |
| SLNC150-200 | 1480 | 262.5 | 72.9 | 14.0 | 78.6 | 18.5 | 4.5 | 200 | 150 | 570 |
| | | 375.0 | 140.1 | 12.0 | 86.9 | | | | | |
| | | 450.0 | 125.0 | 10.0 | 81.0 | | | | | |
| SLNC150-200A | 1480 | 252.0 | 70.0 | 12.0 | 78.1 | 15 | 4.5 | 200 | 150 | 564 |
| | | 360.0 | 100.0 | 10.5 | 84.0 | | | | | |
| | | 432.0 | 120.0 | 9.5 | 78.0 | | | | | |
| SLNC150-200B | 1480 | 231.0 | 64.1 | 10.5 | 77.3 | 15 | 4.5 | 200 | 150 | 558 |
| | | 330.0 | 91.6 | 9.5 | 78.9 | | | | | |
| | | 396.0 | 110.0 | 7.5 | 73.8 | | | | | |
| SLNC150-250 | 1480 | 266.0 | 73.9 | 21.1 | 78.6 | 30 | 4.5 | 200 | 150 | 445 |
| | | 380.0 | 105.6 | 19.5 | 80.1 | | | | | |
| | | 456.0 | 126.7 | 17.2 | 79.8 | | | | | |
| SLNC150-250A | 1480 | 252.0 | 70.0 | 19.4 | 78.4 | 30 | 4.5 | 200 | 150 | 443 |
| | | 360.0 | 100.0 | 18.0 | 79.6 | | | | | |
| | | 432.0 | 120.0 | 15.8 | 79.3 | | | | | |
| SLNC150-250B | 1480 | 231.0 | 64.2 | 16.2 | 78.2 | 22 | 4.5 | 200 | 150 | 450 |
| | | 330.0 | 91.7 | 15.0 | 79.2 | | | | | |
| | | 396.0 | 110.0 | 13.2 | 78.3 | | | | | |
| SLNC150-250C | 1480 | 217.0 | 60.3 | 15.1 | 78.0 | 22 | 4.5 | 200 | 150 | 487 |
| | | 310.0 | 86.1 | 14.0 | 78.8 | | | | | |
| | | 372.0 | 103.3 | 12.3 | 77.9 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC150-315 | 1480 | 266.0 | 73.9 | 33.5 | 77.9 | 55 | 4.0 | 200 | 150 | 794 |
| | | 380.0 | 105.6 | 31.0 | 79.8 | | | | | |
| | | 456.0 | 126.7 | 27.3 | 80.4 | | | | | |
| SLNC150-315A | 1480 | 252.0 | 70.0 | 29.2 | 78.1 | 45 | 4.0 | 200 | 150 | 680 |
| | | 360.0 | 100.0 | 27.0 | 79.6 | | | | | |
| | | 432.0 | 120.0 | 23.8 | 80.2 | | | | | |
| SLNC150-315B | 1480 | 231.0 | 64.2 | 25.9 | 78.1 | 37 | 4.0 | 200 | 150 | 646 |
| | | 330.0 | 91.7 | 24.0 | 79.3 | | | | | |
| | | 396.0 | 110.0 | 21.1 | 80.0 | | | | | |
| SLNC150-315C | 1480 | 210.0 | 58.3 | 21.6 | 77.9 | 30 | 4.0 | 200 | 150 | 575 |
| | | 300.0 | 83.3 | 20.0 | 79.0 | | | | | |
| | | 360.0 | 100.0 | 17.6 | 79.6 | | | | | |
| SLNC150-315D | 1480 | 203.0 | 56.4 | 18.4 | 77.8 | 30 | 4.0 | 200 | 150 | 573 |
| | | 290.0 | 80.6 | 17.0 | 78.9 | | | | | |
| | | 348.0 | 96.7 | 15.0 | 79.2 | | | | | |
| SLNC150-400 | 1480 | 266.0 | 73.9 | 55.1 | 76.2 | 75 | 4.0 | 200 | 150 | 1004 |
| | | 380.0 | 105.6 | 51.0 | 81.8 | | | | | |
| | | 456.0 | 126.7 | 44.9 | 79.9 | | | | | |
| SLNC150-400A | 1480 | 255.5 | 71.0 | 51.8 | 75.7 | 75 | 4.0 | 200 | 150 | 897 |
| | | 365.0 | 101.4 | 48.0 | 80.9 | | | | | |
| | | 438.0 | 121.7 | 42.2 | 80.0 | | | | | |
| SLNC150-400B | 1480 | 245.0 | 68.1 | 46.4 | 75.0 | 75 | 4.0 | 200 | 150 | 735 |
| | | 350.0 | 97.2 | 43.0 | 80.1 | | | | | |
| | | 420.0 | 116.7 | 37.8 | 80.1 | | | | | |
| SLNC150-400C | 1480 | 231.0 | 64.2 | 41.0 | 75.6 | 55 | 4.0 | 200 | 150 | 673 |
| | | 330.0 | 91.7 | 38.0 | 79.1 | | | | | |
| | | 396.0 | 110.0 | 33.4 | 80.0 | | | | | |
| SLNC150-400D | 1480 | 217.0 | 60.3 | 35.6 | 76.1 | 45 | 4.0 | 200 | 150 | 662 |
| | | 310.0 | 86.1 | 33.0 | 78.9 | | | | | |
| | | 372.0 | 103.3 | 29.0 | 79.7 | | | | | |
| SLNC200-315 | 1480 | 385.0 | 106.9 | 34.6 | 79.9 | 75 | 5.5 | 250 | 200 | 945 |
| | | 550.0 | 152.8 | 32.0 | 82.6 | | | | | |
| | | 660.0 | 183.3 | 28.2 | 81.5 | | | | | |
| SLNC200-315A | 1480 | 364.0 | 101.1 | 29.2 | 79.6 | 55 | 5.5 | 250 | 200 | 875 |
| | | 520.0 | 144.4 | 27.0 | 81.0 | | | | | |
| | | 624.0 | 173.3 | 23.8 | 81.3 | | | | | |
| SLNC200-315B | 1480 | 343.0 | 95.3 | 24.8 | 79.4 | 55 | 5.5 | 250 | 200 | 873 |
| | | 490.0 | 136.1 | 23.0 | 80.6 | | | | | |
| | | 588.0 | 163.3 | 20.2 | 80.5 | | | | | |

性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC200-315C | 1480 | 322.0 | 89.4 | 21.6 | 79.2 | 45 | 5.5 | 250 | 200 | 701 |
| | | 460.0 | 127.8 | 20.0 | 80.4 | | | | | |
| | | 552.0 | 153.3 | 17.6 | 79.8 | | | | | |
| SLNC200-400 | 1480 | 385.0 | 106.9 | 47.5 | 78.6 | 110 | 5.5 | 250 | 200 | 1396 |
| | | 550.0 | 152.8 | 44.0 | 81.0 | | | | | |
| | | 660.0 | 183.3 | 38.7 | 81.5 | | | | | |
| SLNC200-400A | 1480 | 364.0 | 101.1 | 40.0 | 79.0 | 75 | 5.5 | 250 | 200 | 980 |
| | | 520.0 | 144.4 | 37.0 | 80.8 | | | | | |
| | | 624.0 | 173.3 | 32.6 | 81.3 | | | | | |
| SLNC200-400B | 1480 | 343.0 | 95.3 | 35.6 | 79.2 | 75 | 5.5 | 250 | 200 | 983 |
| | | 490.0 | 136.1 | 33.0 | 80.6 | | | | | |
| | | 588.0 | 163.3 | 29.0 | 81.1 | | | | | |
| SLNC200-400C | 1480 | 322.0 | 89.4 | 28.1 | 79.2 | 55 | 5.5 | 250 | 200 | 768 |
| | | 460.0 | 127.8 | 26.0 | 80.4 | | | | | |
| | | 552.0 | 153.3 | 22.9 | 81.0 | | | | | |
| SLNC200-450 | 1480 | 462.0 | 128.3 | 64.8 | 77.9 | 160 | 5.5 | 250 | 200 | 1750 |
| | | 660.0 | 183.3 | 60.0 | 80.9 | | | | | |
| | | 792.0 | 220.0 | 52.8 | 82.0 | | | | | |
| SLNC200-450A | 1480 | 441.0 | 122.5 | 58.3 | 78.2 | 160 | 5.5 | 250 | 200 | 1680 |
| | | 630.0 | 175.0 | 54.0 | 81.0 | | | | | |
| | | 756.0 | 210.0 | 47.5 | 81.9 | | | | | |
| SLNC200-450B | 1480 | 420.0 | 116.7 | 52.9 | 78.5 | 132 | 5.5 | 250 | 200 | 1570 |
| | | 600.0 | 166.7 | 49.0 | 81.2 | | | | | |
| | | 720.0 | 200.0 | 43.1 | 81.8 | | | | | |
| SLNC200-450C | 1480 | 399.0 | 110.8 | 47.5 | 78.9 | 110 | 5.5 | 250 | 200 | 1460 |
| | | 570.0 | 158.3 | 44.0 | 81.1 | | | | | |
| | | 684.0 | 190.0 | 38.7 | 81.6 | | | | | |
| SLNC200-450D | 1480 | 378.0 | 105.0 | 43.2 | 79.0 | 90 | 5.5 | 250 | 200 | 1350 |
| | | 540.0 | 150.0 | 40.0 | 80.9 | | | | | |
| | | 648.0 | 180.0 | 35.2 | 81.4 | | | | | |
| SLNC250-315 | 1480 | 560.0 | 155.5 | 24.0 | 81.0 | 75 | 5.0 | 300 | 250 | 1377 |
| | | 800.0 | 222.2 | 22.0 | 80.7 | | | | | |
| | | 960.0 | 266.6 | 18.0 | 79.0 | | | | | |
| SLNC250-315A | 1480 | 546.0 | 151.6 | 23.0 | 80.9 | 75 | 5.0 | 300 | 250 | 1093 |
| | | 780.0 | 216.6 | 21.0 | 80.4 | | | | | |
| | | 936.0 | 260.0 | 17.0 | 78.5 | | | | | |
| SLNC250-315B | 1480 | 525.0 | 145.8 | 22.0 | 80.8 | 55 | 5.0 | 300 | 250 | 988 |
| | | 750.0 | 208.3 | 19.0 | 79.9 | | | | | |
| | | 900.0 | 250.0 | 16.0 | 78.0 | | | | | |





性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC250-315C | 1480 | 490.0 | 136.1 | 18.0 | 80.0 | 55 | 5.0 | 300 | 250 | 828 |
| | | 700.0 | 194.4 | 17.0 | 79.3 | | | | | |
| | | 840.0 | 233.3 | 15.0 | 77.7 | | | | | |
| SLNC250-355 | 1480 | 640.0 | 177.7 | 41.0 | 81.4 | 132 | 5.5 | 300 | 250 | 1508 |
| | | 800.0 | 222.2 | 37.0 | 82.0 | | | | | |
| | | 960.0 | 266.6 | 34.0 | 82.5 | | | | | |
| SLNC250-355A | 1480 | 608.0 | 168.8 | 37.0 | 81.2 | 110 | 5.5 | 300 | 250 | 1510 |
| | | 760.0 | 211.1 | 33.0 | 81.9 | | | | | |
| | | 912.0 | 253.3 | 27.0 | 81.7 | | | | | |
| SLNC250-355B | 1480 | 576.0 | 160.0 | 31.0 | 81.1 | 90 | 5.5 | 300 | 250 | 1470 |
| | | 720.0 | 200.0 | 28.0 | 81.8 | | | | | |
| | | 864.0 | 240.0 | 24.0 | 81.1 | | | | | |
| SLNC250-355C | 1480 | 520.0 | 144.4 | 26.0 | 80.8 | 75 | 5.5 | 300 | 250 | 1420 |
| | | 650.0 | 180.5 | 24.0 | 81.4 | | | | | |
| | | 780.0 | 216.6 | 21.0 | 80.4 | | | | | |
| SLNC250-400 | 1480 | 560.0 | 155.5 | 61.0 | 79.8 | 200 | 5.0 | 300 | 250 | 1600 |
| | | 800.0 | 222.2 | 56.0 | 83.0 | | | | | |
| | | 960.0 | 266.6 | 51.0 | 82.5 | | | | | |
| SLNC250-400A | 1480 | 539.0 | 149.7 | 52.0 | 80.3 | 160 | 5.0 | 300 | 250 | 1535 |
| | | 770.0 | 213.8 | 47.0 | 81.9 | | | | | |
| | | 924.0 | 256.6 | 42.0 | 82.4 | | | | | |
| SLNC250-400B | 1480 | 518.0 | 143.8 | 44.0 | 80.8 | 132 | 5.0 | 300 | 250 | 1391 |
| | | 740.0 | 205.5 | 40.0 | 81.8 | | | | | |
| | | 888.0 | 246.6 | 34.0 | 82.3 | | | | | |
| SLNC250-400C | 1480 | 490.0 | 136.1 | 33.0 | 80.6 | 90 | 5.0 | 300 | 250 | 1383 |
| | | 700.0 | 194.4 | 31.0 | 81.7 | | | | | |
| | | 840.0 | 233.3 | 26.0 | 81.6 | | | | | |
| SLNC300-400 | 1480 | 840.0 | 233.3 | 44.0 | 82.1 | 200 | 7.5 | 350 | 300 | 1900 |
| | | 1200.0 | 333.3 | 41.0 | 83.1 | | | | | |
| | | 1440.0 | 400.0 | 38.0 | 83.1 | | | | | |
| SLNC300-400A | 1480 | 770.0 | 213.8 | 37.0 | 81.9 | 160 | 7.5 | 350 | 300 | 1810 |
| | | 1100.0 | 305.5 | 35.0 | 82.9 | | | | | |
| | | 1320.0 | 366.6 | 32.0 | 82.2 | | | | | |
| SLNC300-400B | 1480 | 700.0 | 194.4 | 34.0 | 81.7 | 132 | 7.5 | 350 | 300 | 1800 |
| | | 1000.0 | 277.7 | 32.0 | 82.7 | | | | | |
| | | 1200.0 | 333.3 | 30.0 | 82.0 | | | | | |
| SLNC300-400C | 1480 | 686.0 | 190.5 | 27.0 | 81.6 | 110 | 7.5 | 350 | 300 | 1640 |
| | | 980.0 | 272.2 | 25.0 | 81.2 | | | | | |
| | | 1176.0 | 326.6 | 23.0 | 80.2 | | | | | |



性能参数表 Performance parameters of the table

| 泵型号 Pump model | 转速 n Speed (r/min) | 流量 Q Capacity | | 扬程 Head (m) | 效率 Efficiency (%) | 电机功率 Motor power (kw) | 必须汽蚀余量 (NPSH)r (m) | 泵口径 Bore(mm) | | 总重量 Grand weight (kg) |
|-------------------|-----------------------|---------------|-------|----------------|----------------------|--------------------------|--------------------|--------------|-----------|--------------------------|
| | | (m³/h) | (L/S) | | | | | 进口 Inlet | 出口 Outlet | |
| SLNC300-450 | 1480 | 840.0 | 233.3 | 57.0 | 82.1 | 250 | 7.5 | 350 | 300 | 2010 |
| | | 1200.0 | 333.3 | 50.0 | 83.1 | | | | | |
| | | 1440.0 | 400.0 | 43.0 | 83.5 | | | | | |
| SLNC300-450A | 1480 | 770.0 | 213.8 | 47.0 | 81.9 | 200 | 7.5 | 350 | 300 | 1950 |
| | | 1100.0 | 305.5 | 44.0 | 82.9 | | | | | |
| | | 1320.0 | 366.6 | 37.0 | 83.0 | | | | | |
| SLNC300-450B | 1480 | 700.0 | 194.4 | 41.0 | 81.7 | 160 | 7.5 | 350 | 300 | 1860 |
| | | 1000.0 | 277.7 | 38.0 | 82.7 | | | | | |
| | | 1200.0 | 333.3 | 32.0 | 82.3 | | | | | |
| SLNC300-450C | 1480 | 630.0 | 175.0 | 35.0 | 81.4 | 132 | 7.5 | 350 | 300 | 1750 |
| | | 900.0 | 250.0 | 33.0 | 82.3 | | | | | |
| | | 1080.0 | 300.0 | 29.0 | 81.9 | | | | | |
| SLNC350-450 | 980 | 1400.0 | 388.8 | 24.0 | 83.4 | 160 | 6.5 | 400 | 350 | 1250 |
| | | 2000.0 | 555.5 | 20.0 | 81.9 | | | | | |
| | | 2400.0 | 666.6 | 15.0 | 78.7 | | | | | |
| SLNC350-450A | 980 | 1302.0 | 361.6 | 21.0 | 83.0 | 132 | 6.5 | 400 | 350 | 950 |
| | | 1860.0 | 516.6 | 17.0 | 80.8 | | | | | |
| | | 2232.0 | 620.0 | 14.0 | 78.4 | | | | | |
| SLNC350-500 | 980 | 1400.0 | 388.8 | 35.0 | 83.4 | 250 | 6.5 | 400 | 350 | 1700 |
| | | 2000.0 | 555.5 | 32.0 | 84.2 | | | | | |
| | | 2400.0 | 666.6 | 27.0 | 83.3 | | | | | |
| SLNC350-500A | 980 | 1302.0 | 361.6 | 30.0 | 83.2 | 200 | 6.5 | 400 | 350 | 1580 |
| | | 1860.0 | 516.6 | 28.0 | 84.0 | | | | | |
| | | 2232.0 | 620.0 | 24.0 | 82.7 | | | | | |
| SLNC350-500B | 980 | 1225.0 | 340.2 | 25.0 | 83.1 | 160 | 6.5 | 400 | 350 | 1510 |
| | | 1750.0 | 486.1 | 24.0 | 83.2 | | | | | |
| | | 2100.0 | 583.3 | 21.0 | 82.1 | | | | | |
| SLNC350-600 | 980 | 1400.0 | 388.8 | 54.0 | 83.0 | 355 | 6.5 | 400 | 350 | 2600 |
| | | 2000.0 | 555.5 | 50.0 | 84.2 | | | | | |
| | | 2400.0 | 666.6 | 42.0 | 84.5 | | | | | |
| SLNC350-600A | 980 | 1302.0 | 361.6 | 47.0 | 83.2 | 315 | 6.5 | 400 | 350 | 2450 |
| | | 1860.0 | 516.6 | 44.0 | 84.0 | | | | | |
| | | 2232.0 | 620.0 | 37.0 | 84.4 | | | | | |
| SLNC350-600B | 980 | 1225.0 | 340.2 | 41.0 | 83.1 | 250 | 6.5 | 400 | 350 | 2310 |
| | | 1750.0 | 486.1 | 38.0 | 83.9 | | | | | |
| | | 2100.0 | 583.3 | 32.0 | 84.3 | | | | | |
| SLNC350-600C | 980 | 980.0 | 272.2 | 39.0 | 82.6 | 200 | 6.5 | 400 | 350 | 2200 |
| | | 1400.0 | 388.8 | 35.0 | 83.4 | | | | | |
| | | 1680.0 | 466.6 | 31.0 | 83.8 | | | | | |







性能曲线图 Performance curve

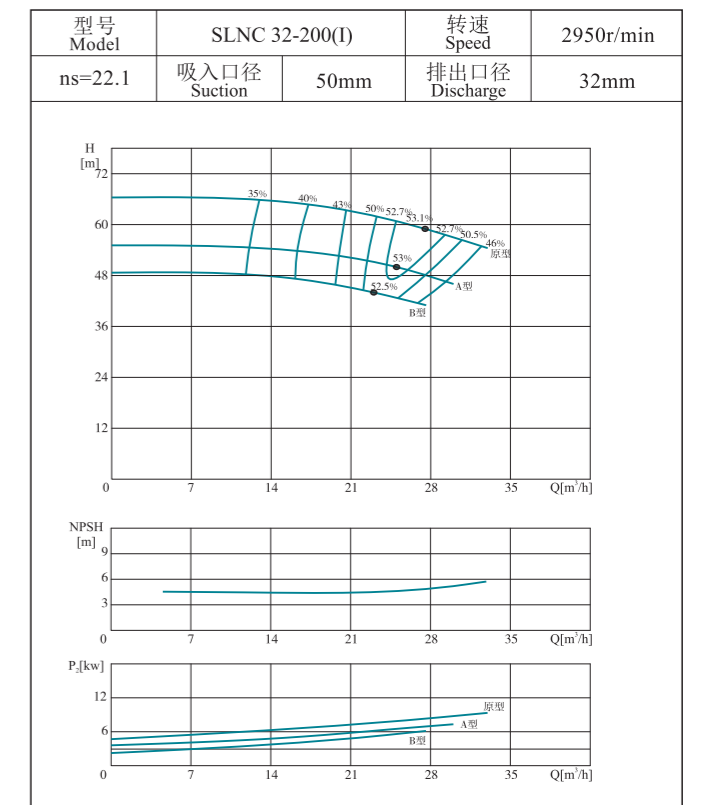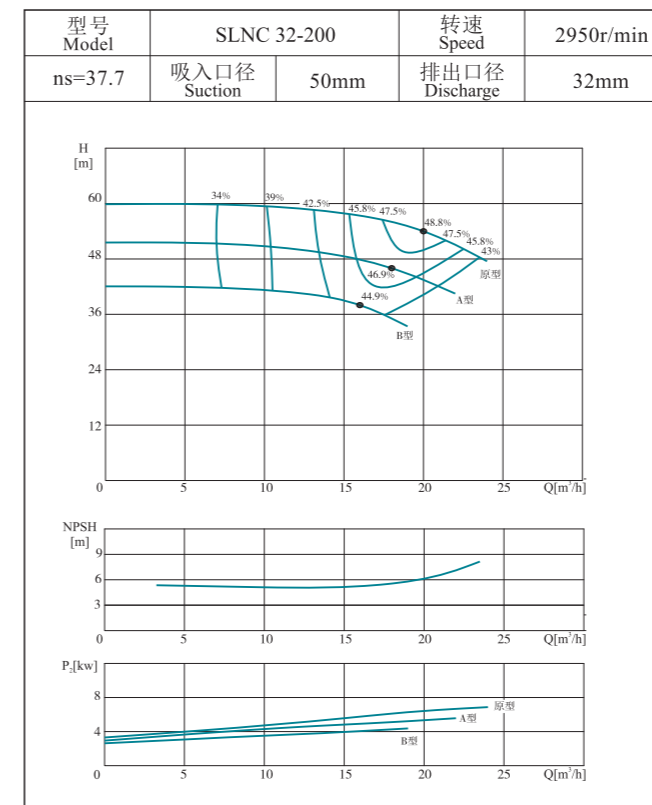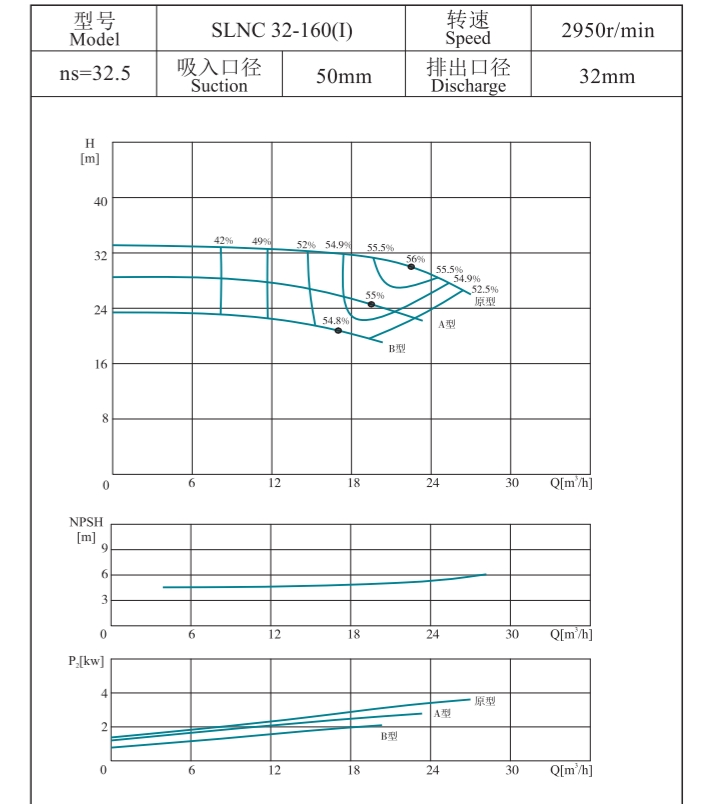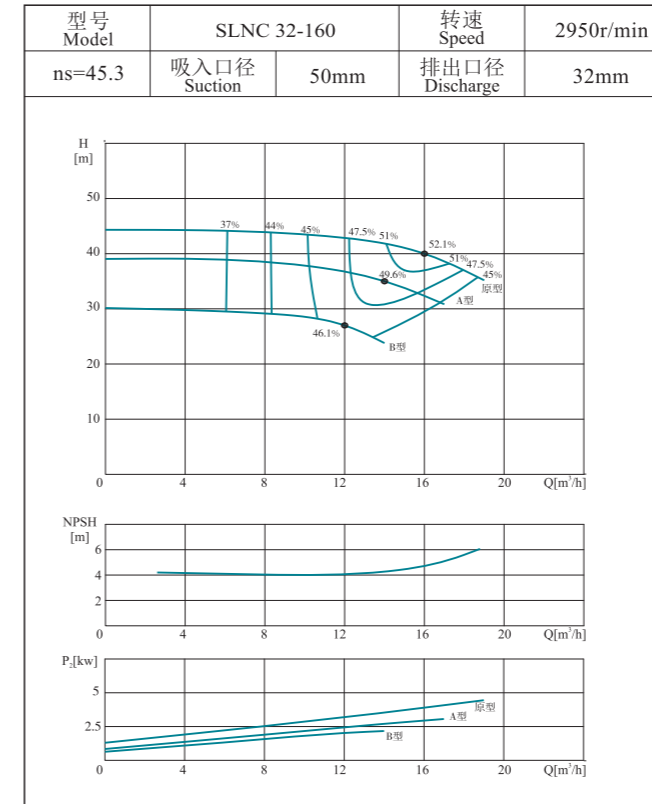



性能曲线图 Performance curve

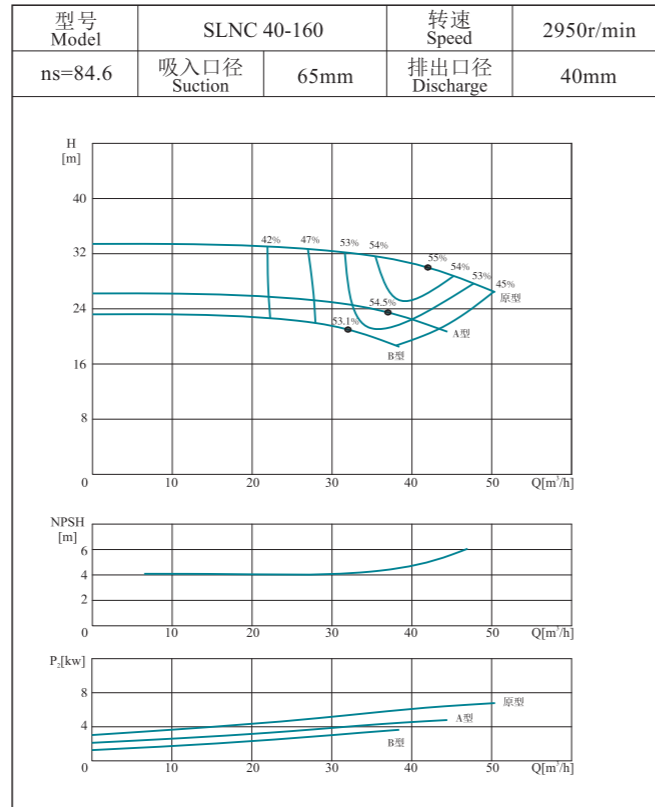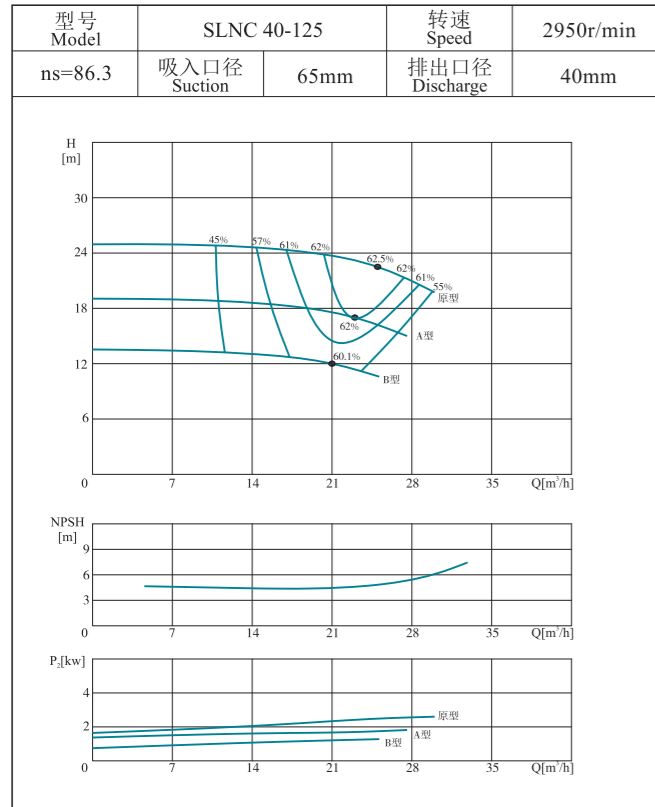







性能曲线图 Performance curve

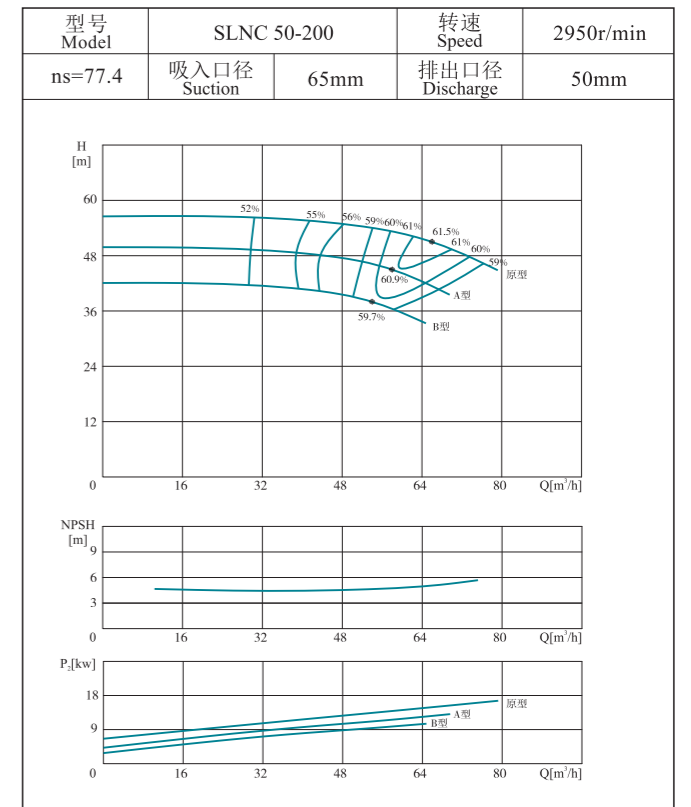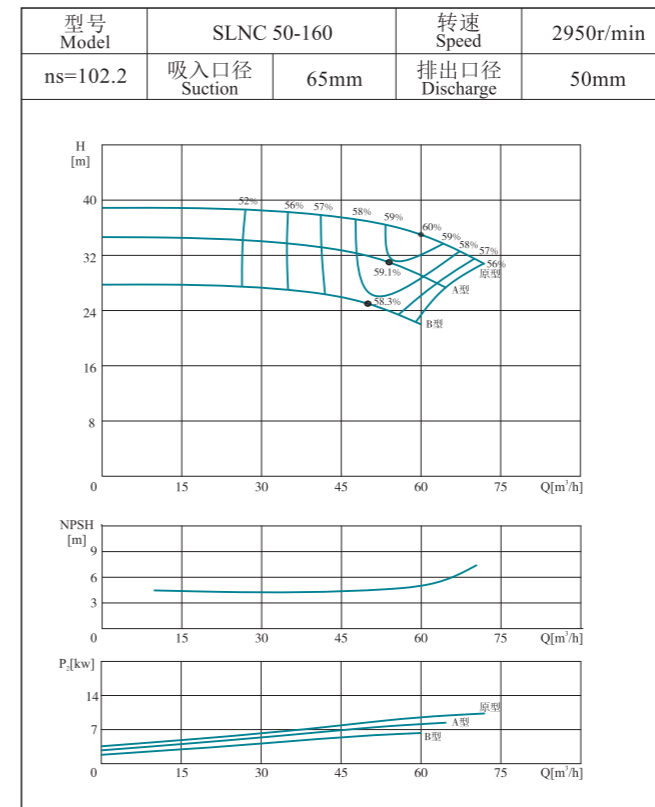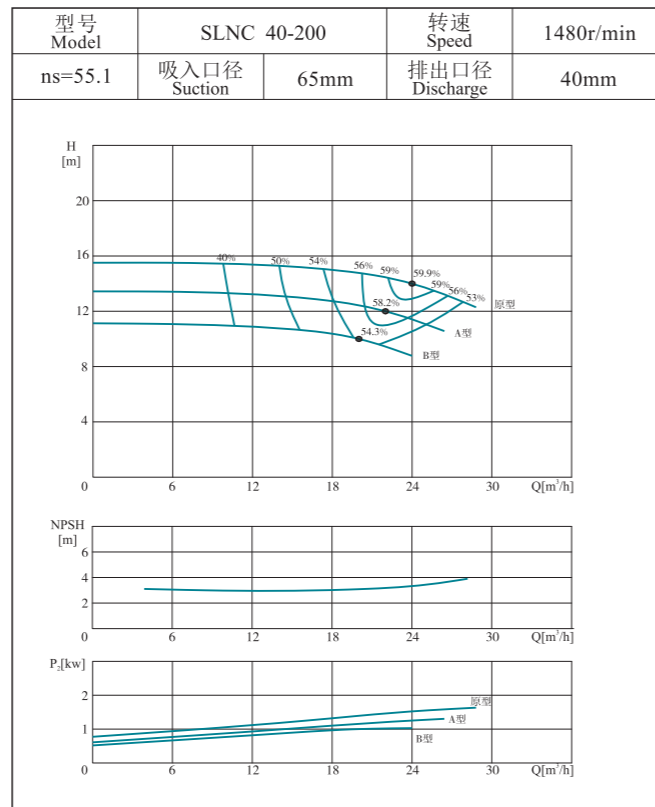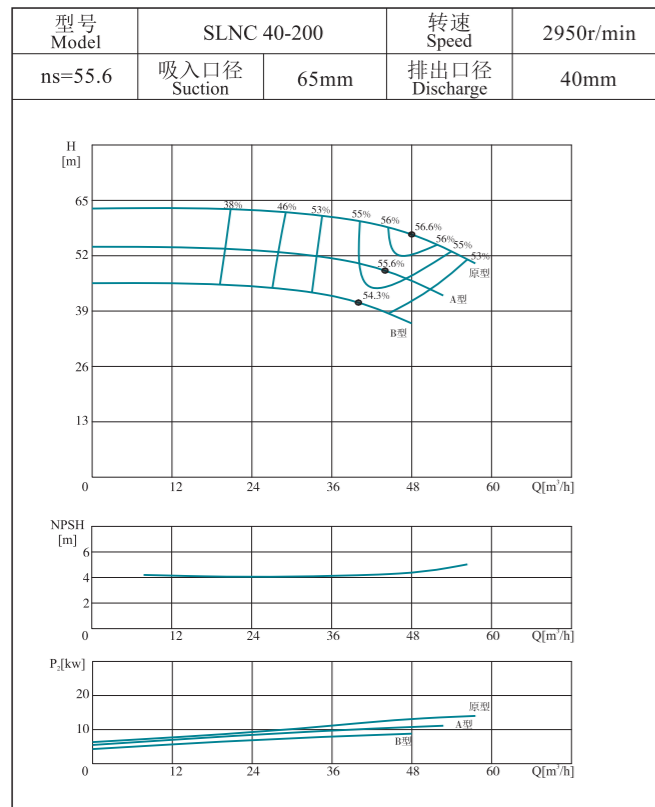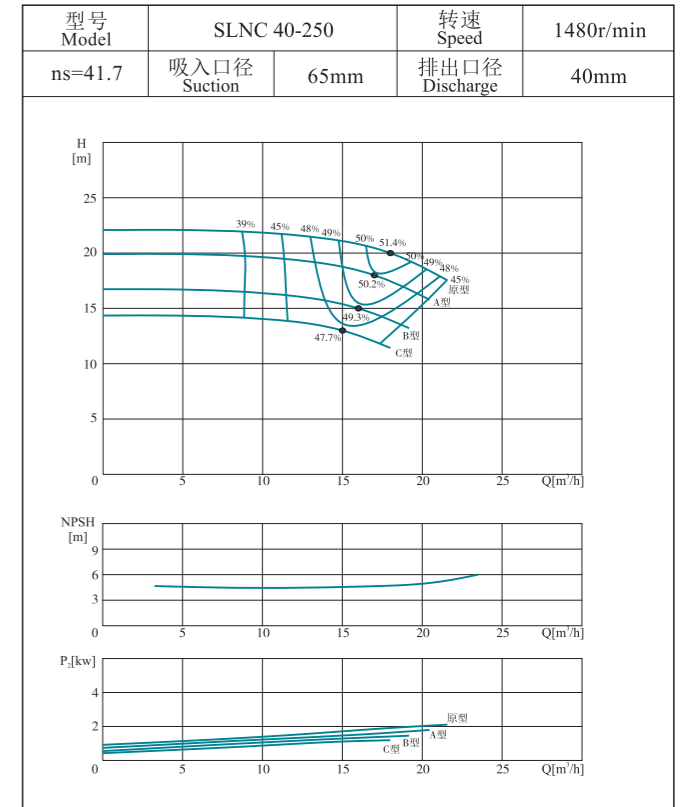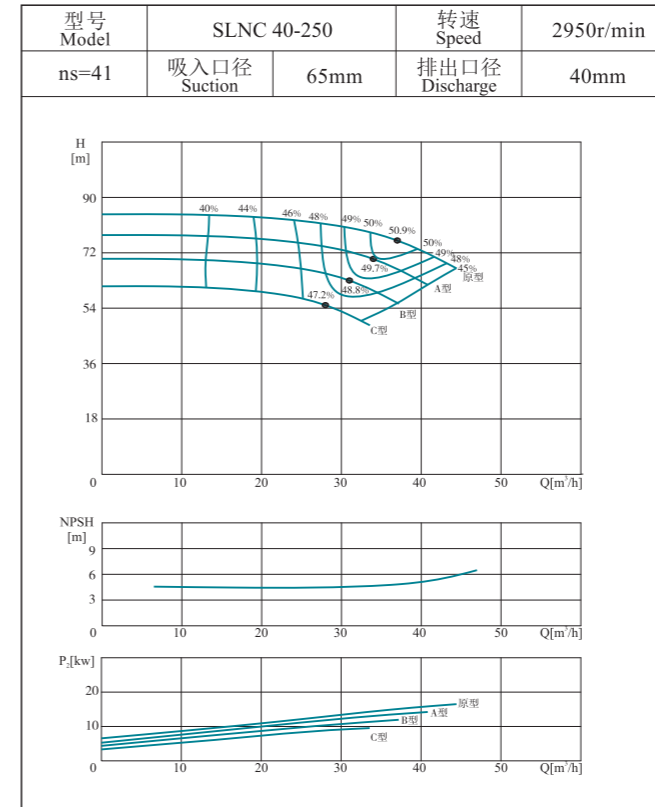



性能曲线图 Performance curve

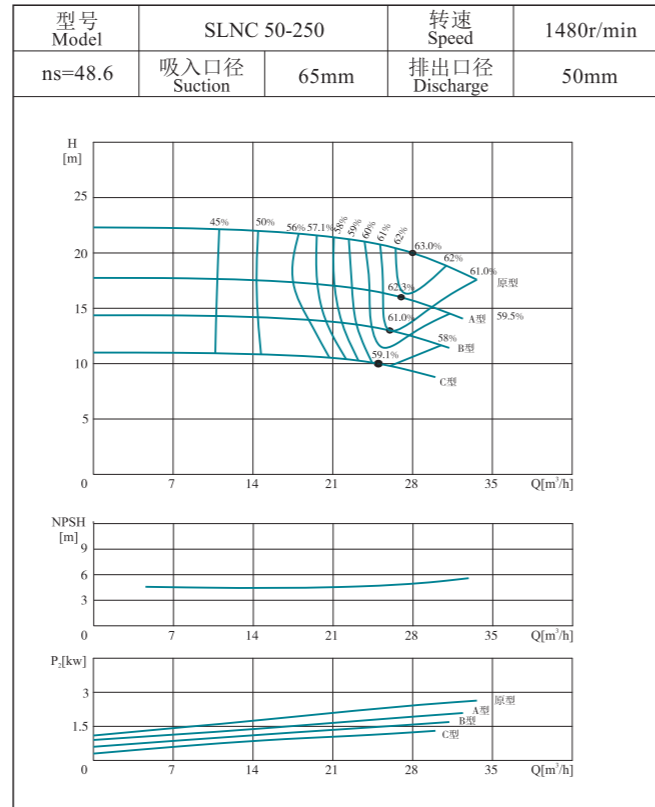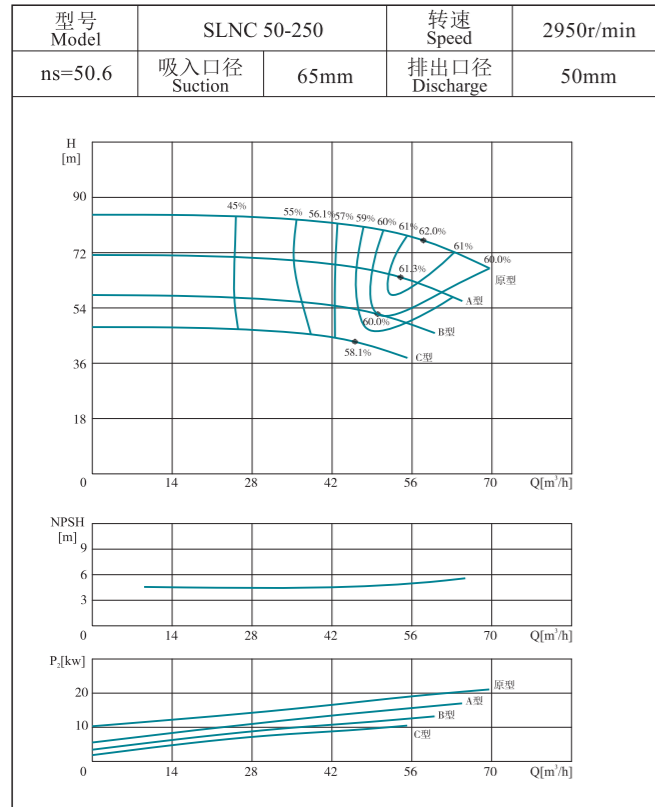







性能曲线图 Performance curve

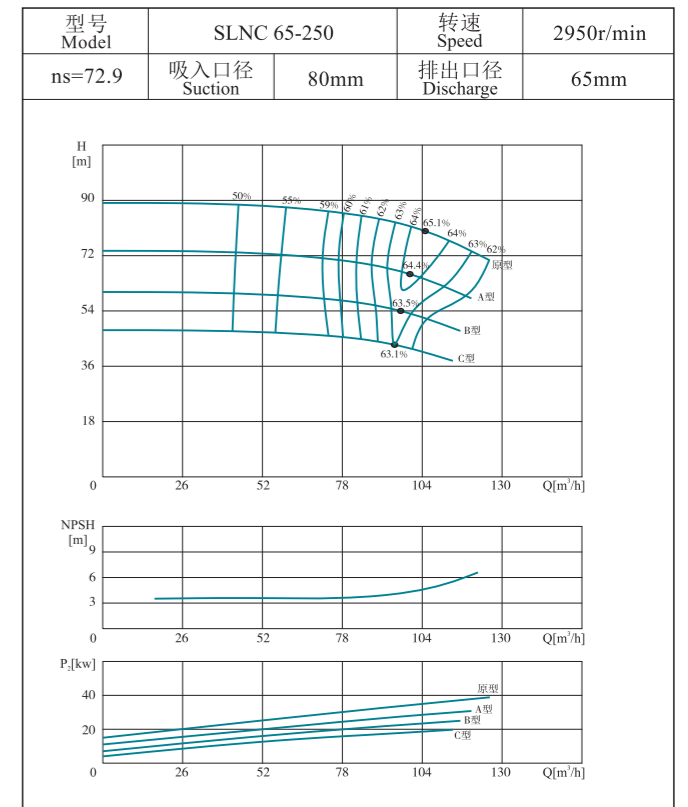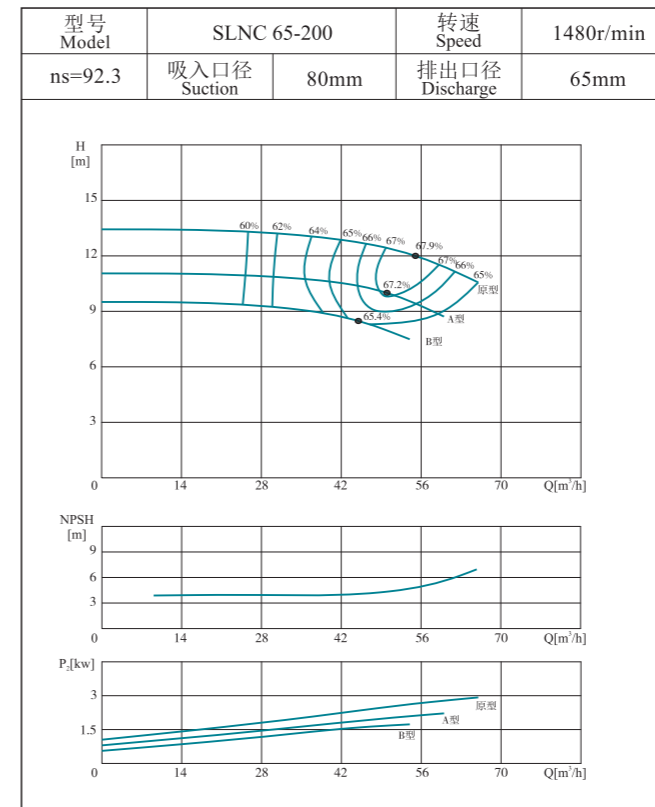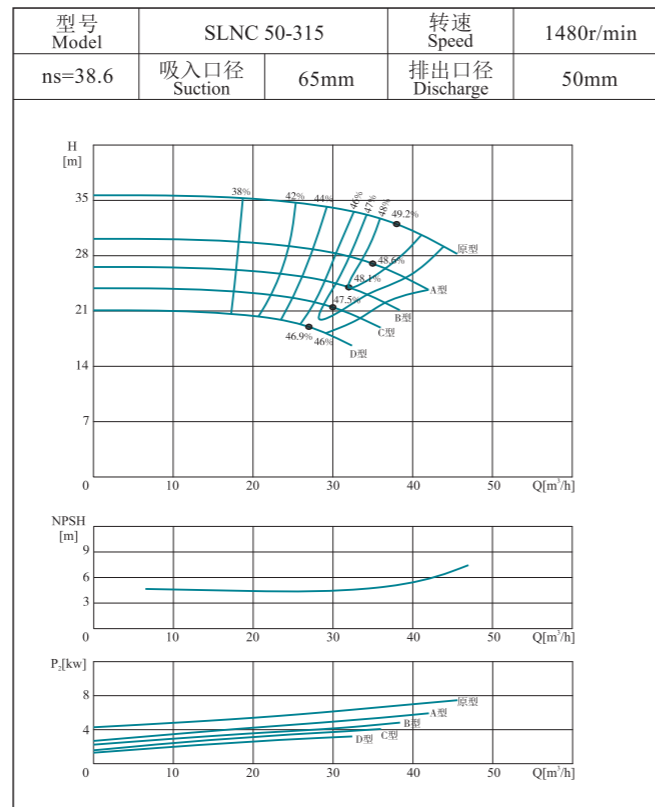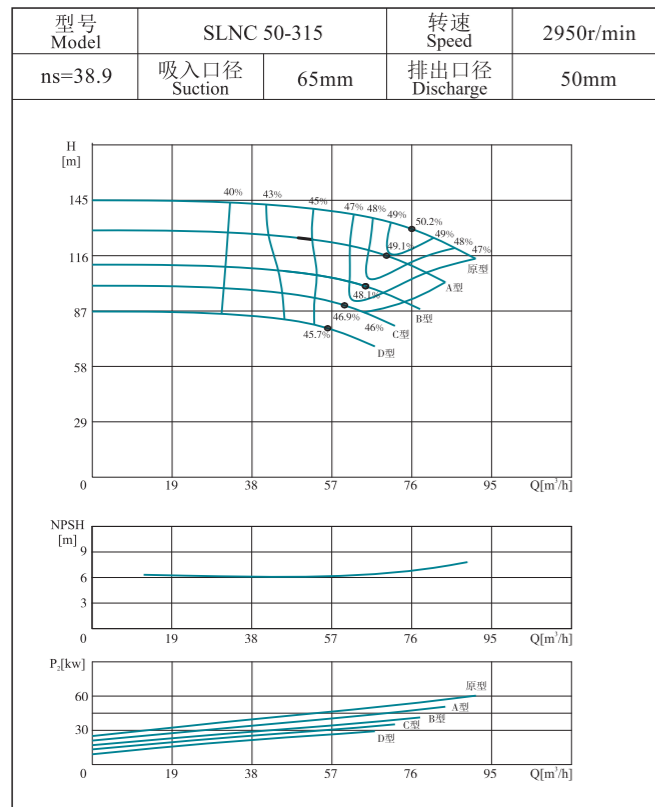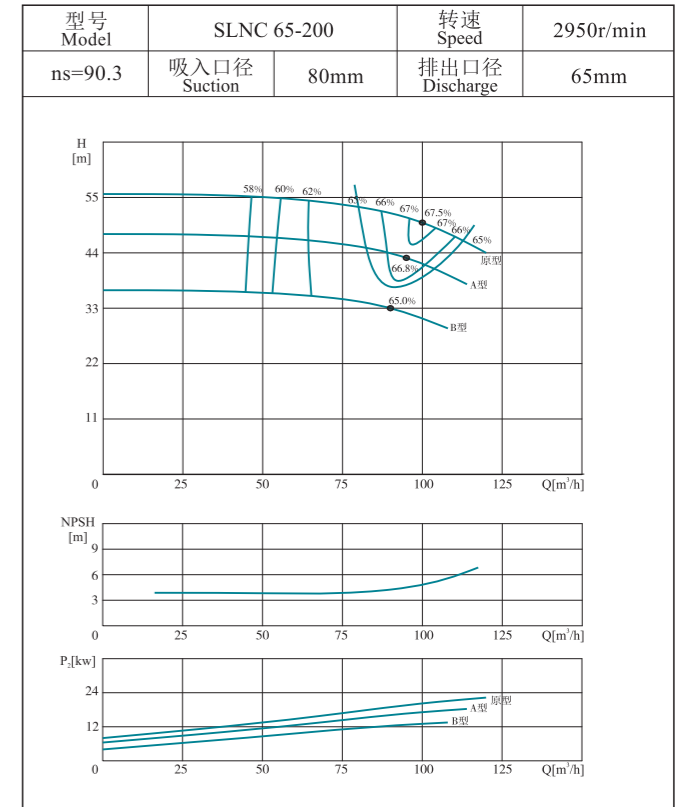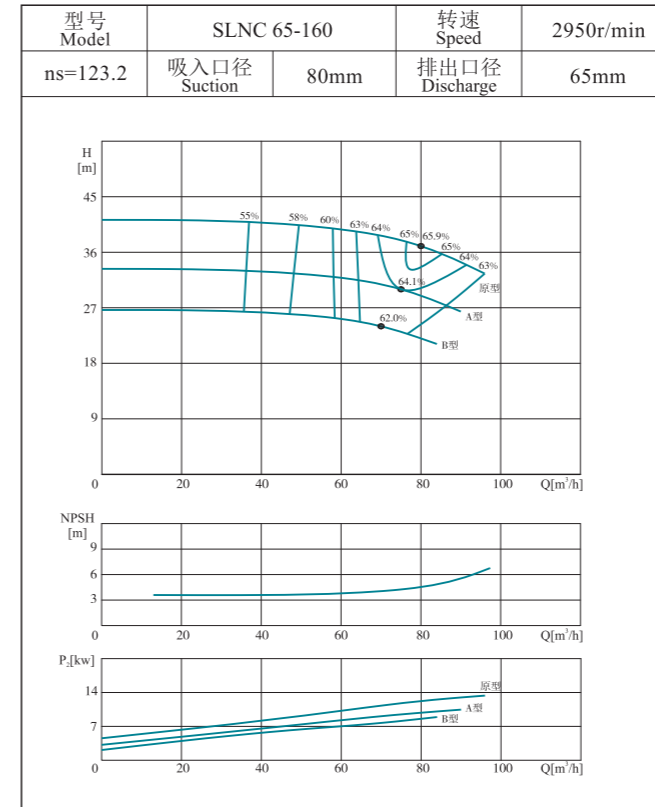



性能曲线图 Performance curve

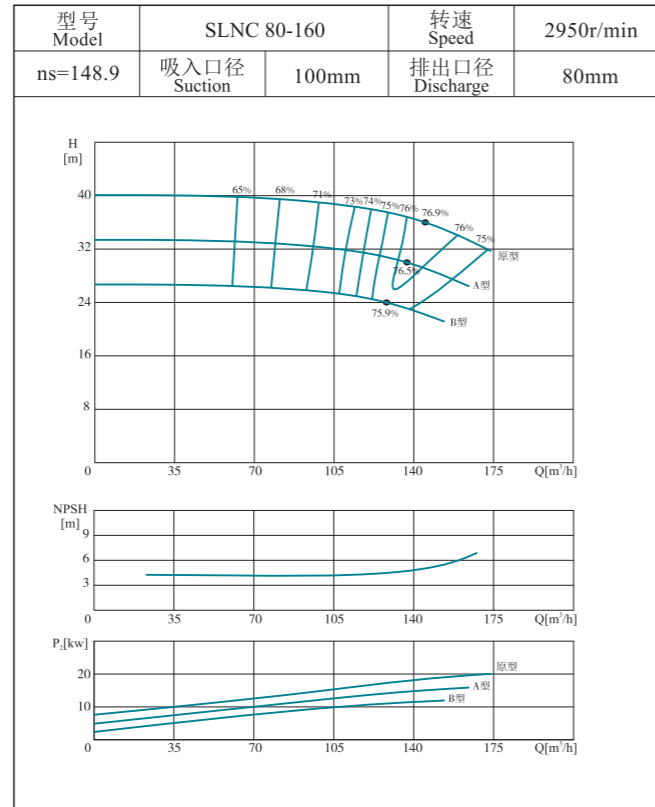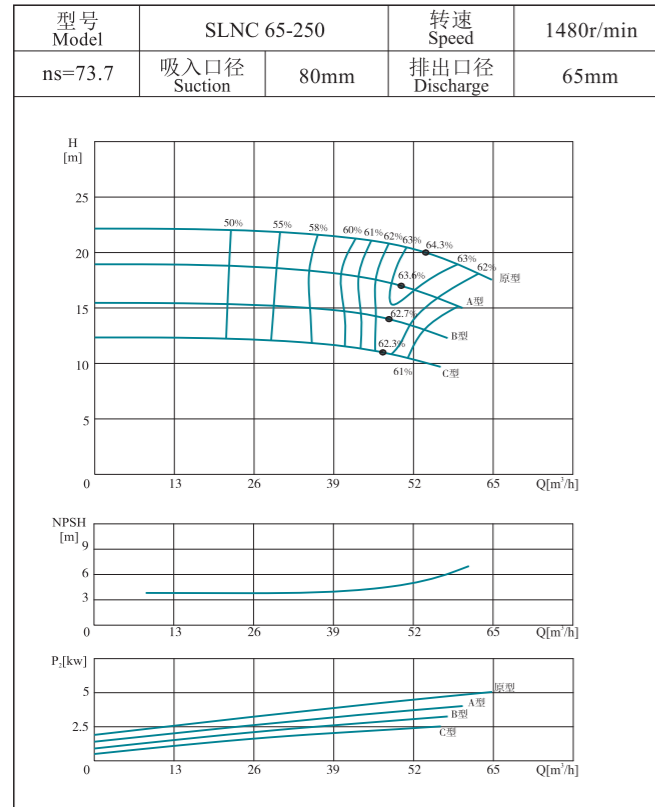







性能曲线图 Performance curve

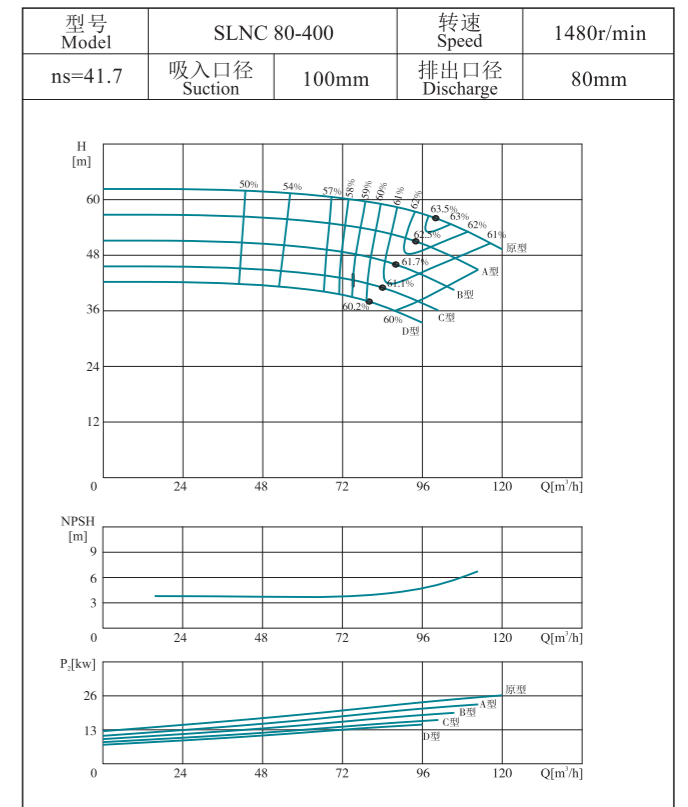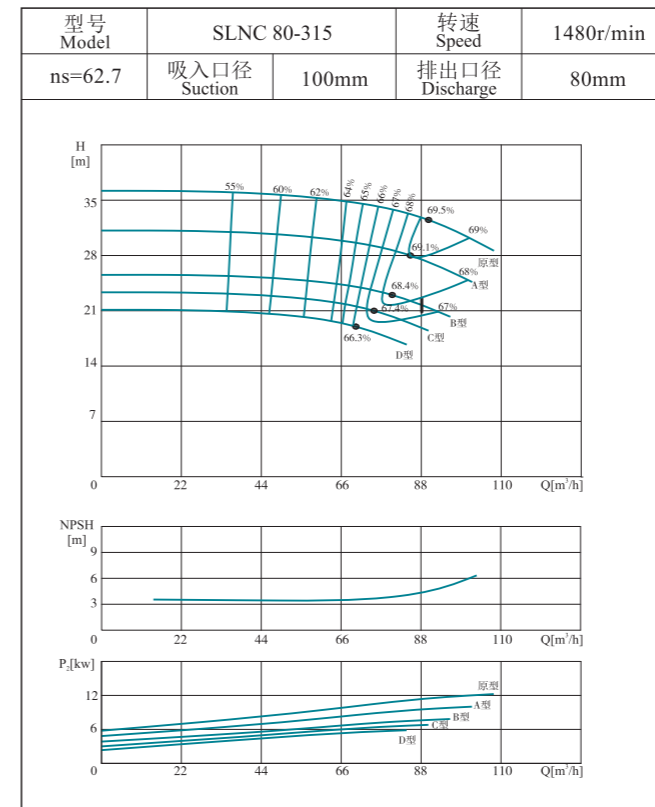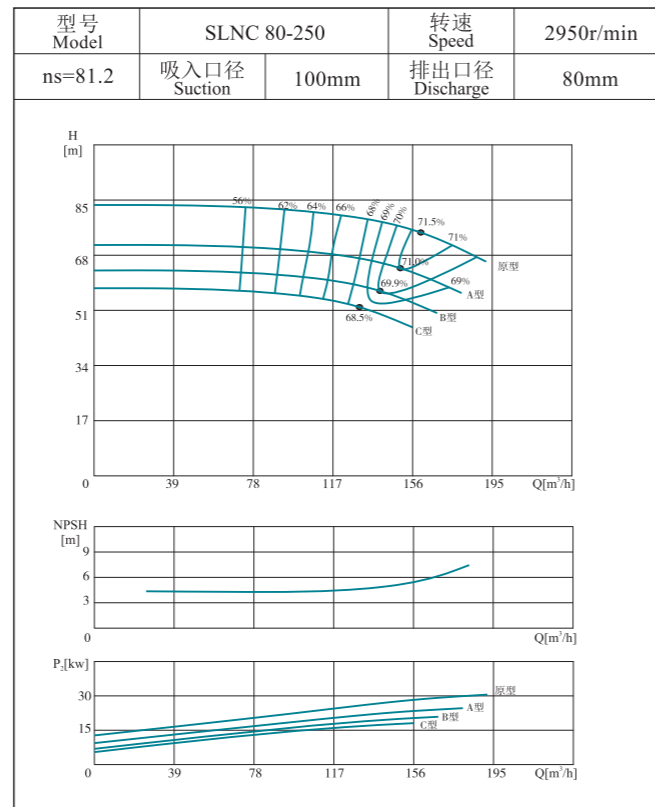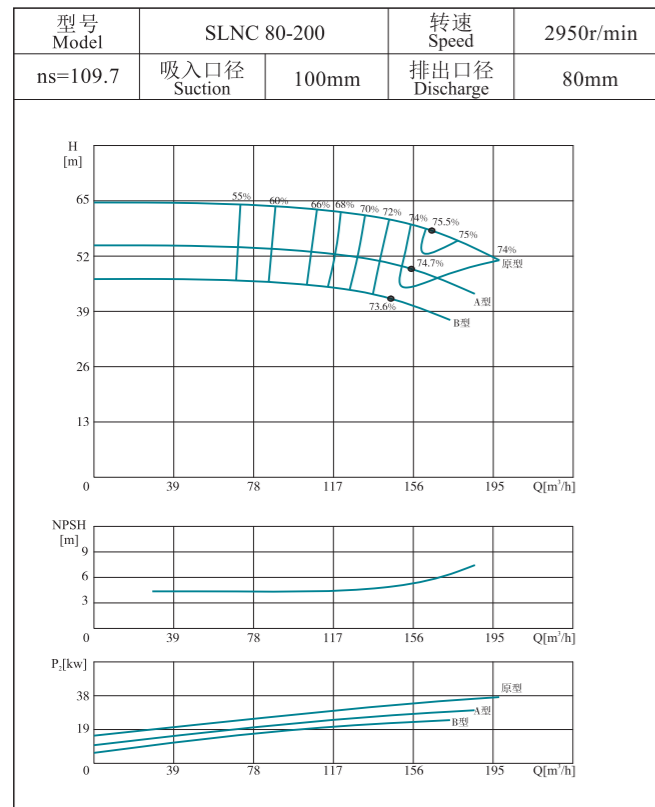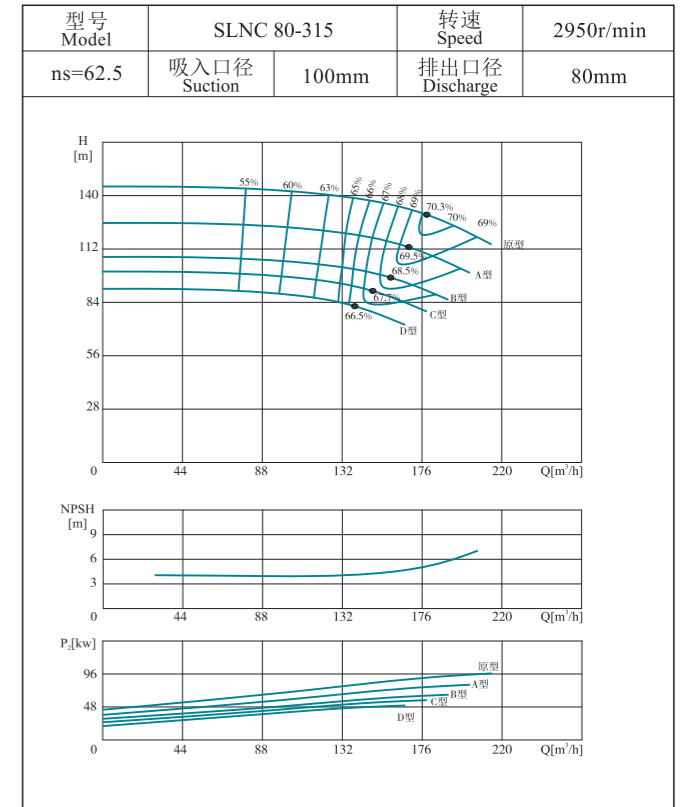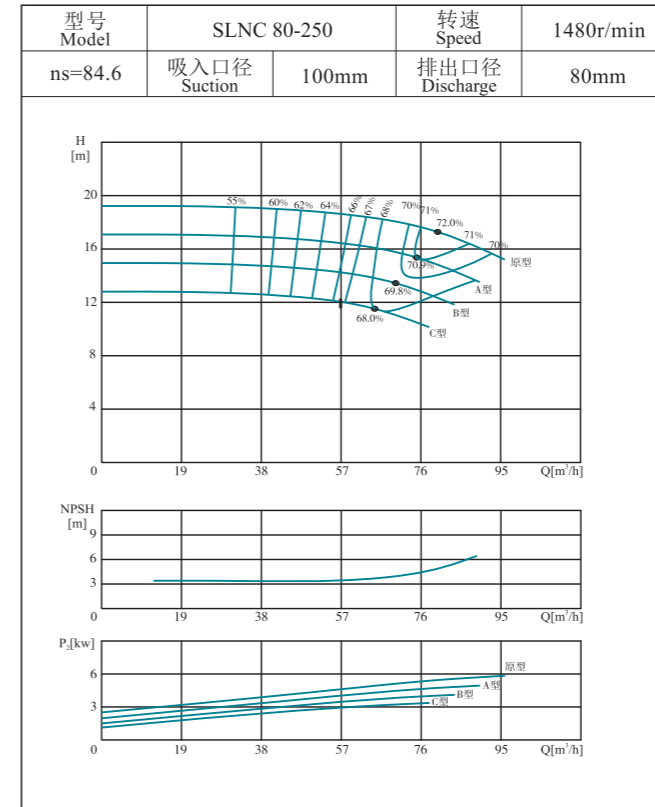



性能曲线图 Performance curve

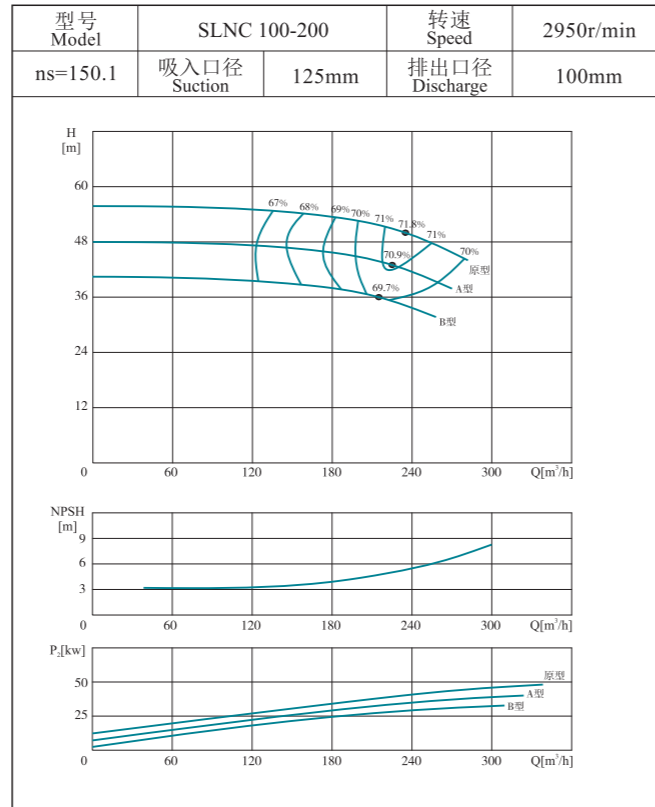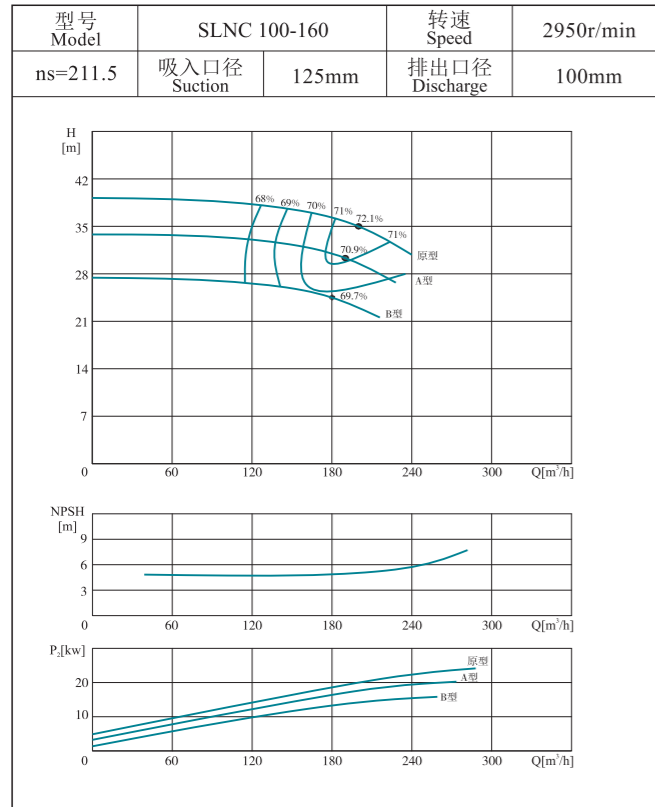







性能曲线图 Performance curve

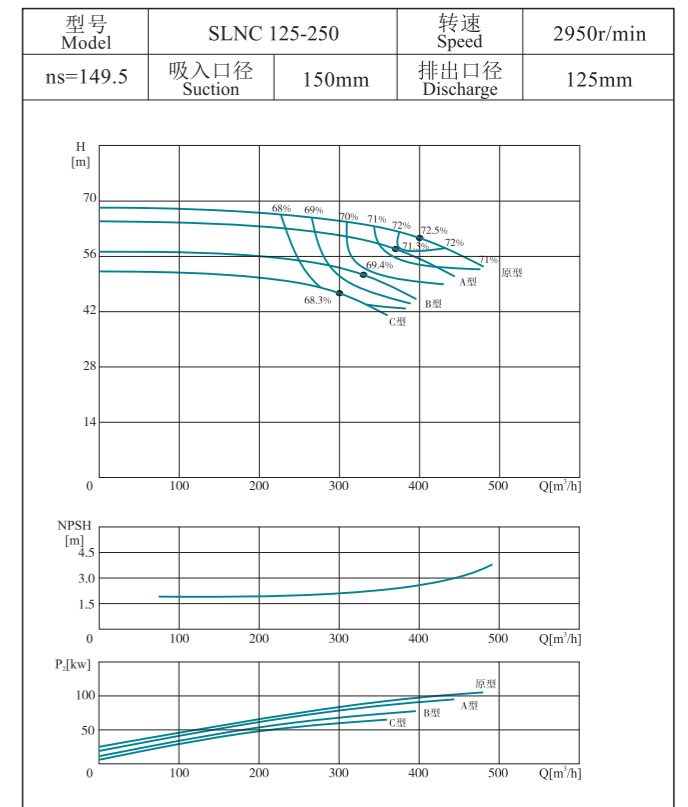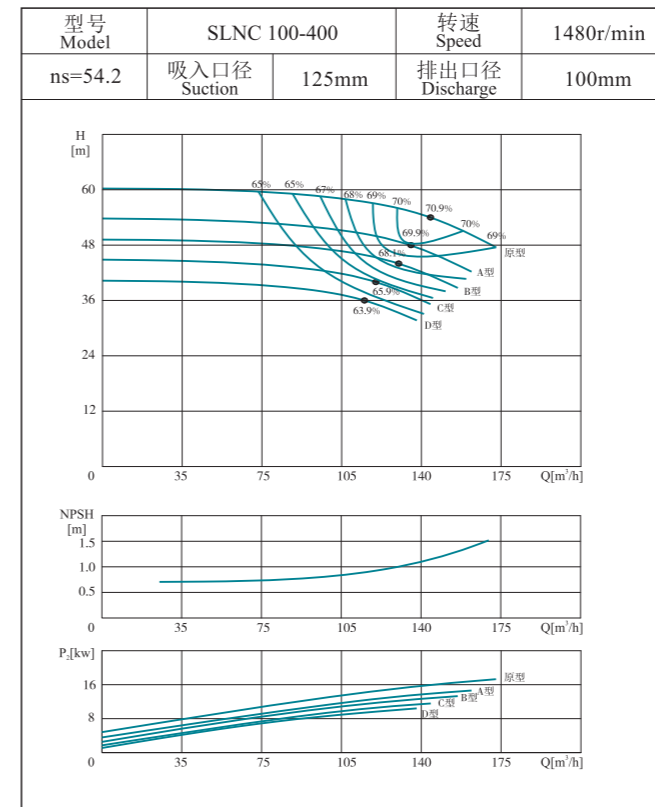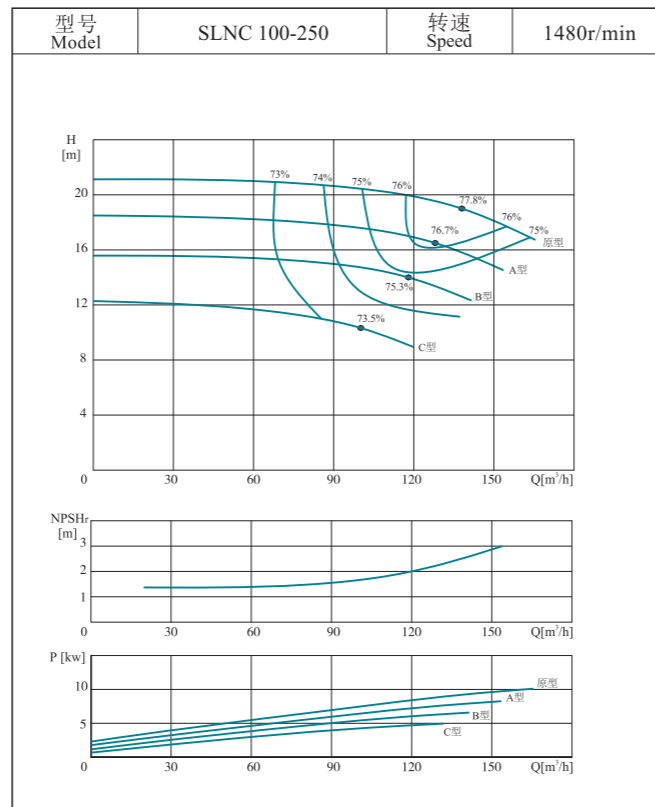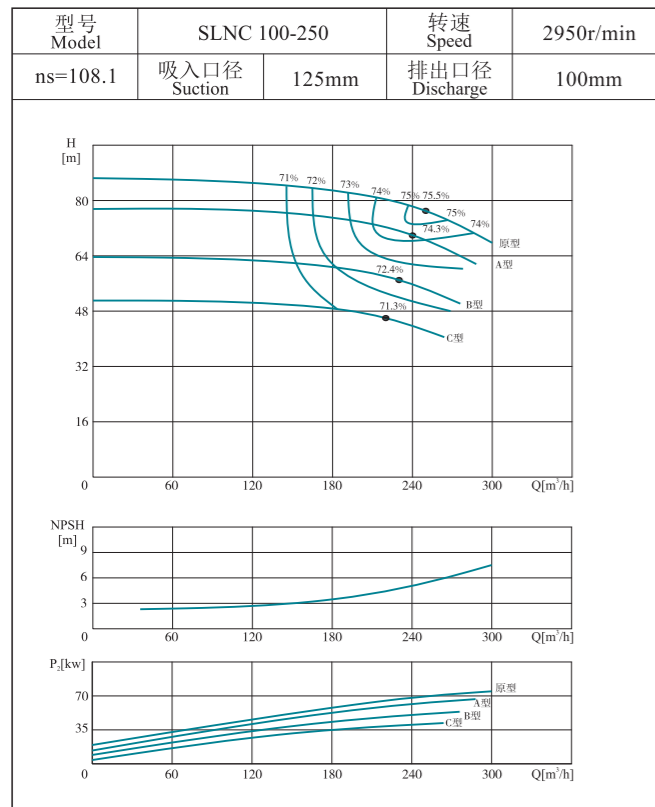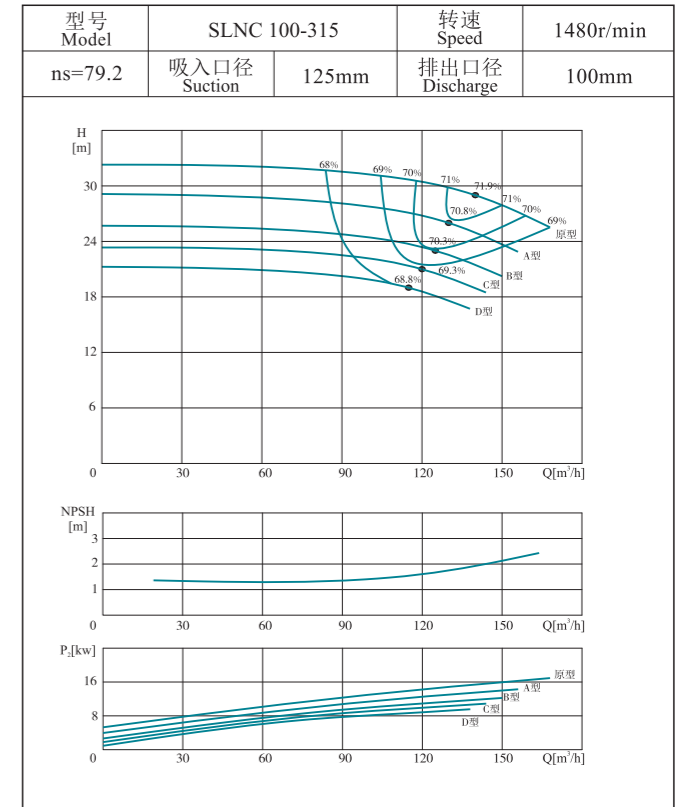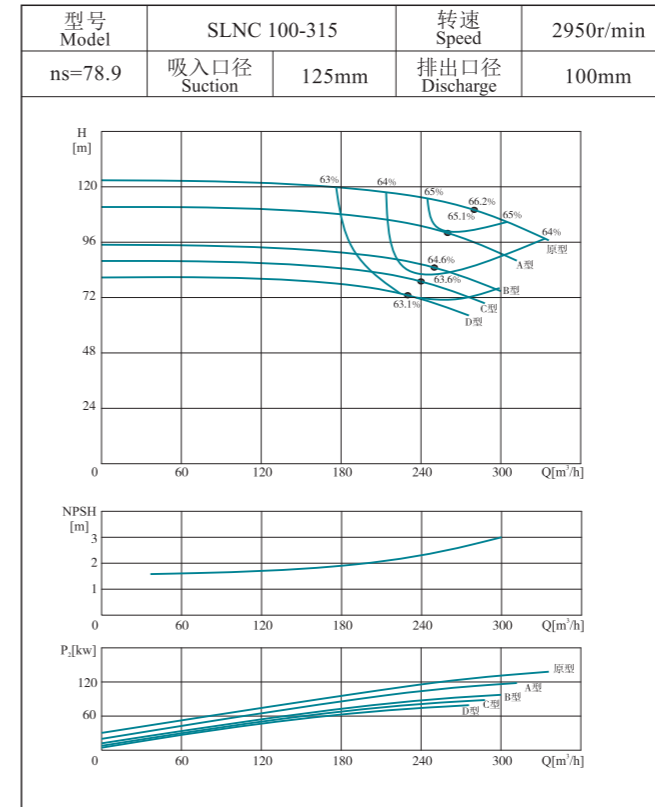



性能曲线图 Performance curve

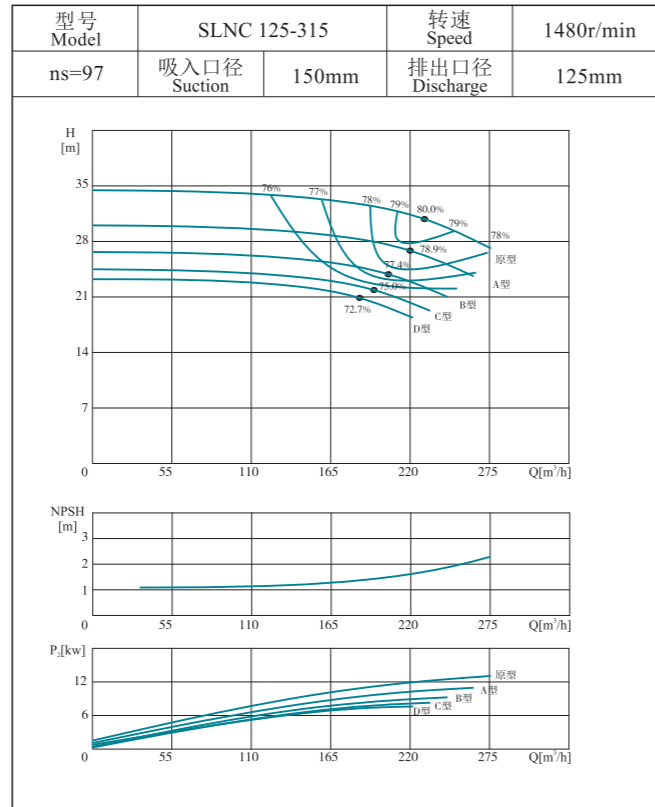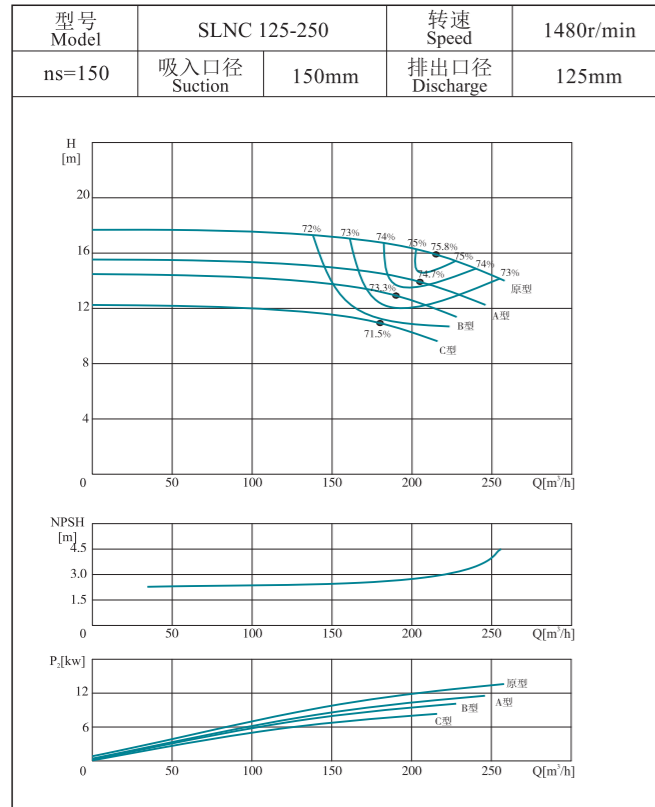







性能曲线图 Performance curve

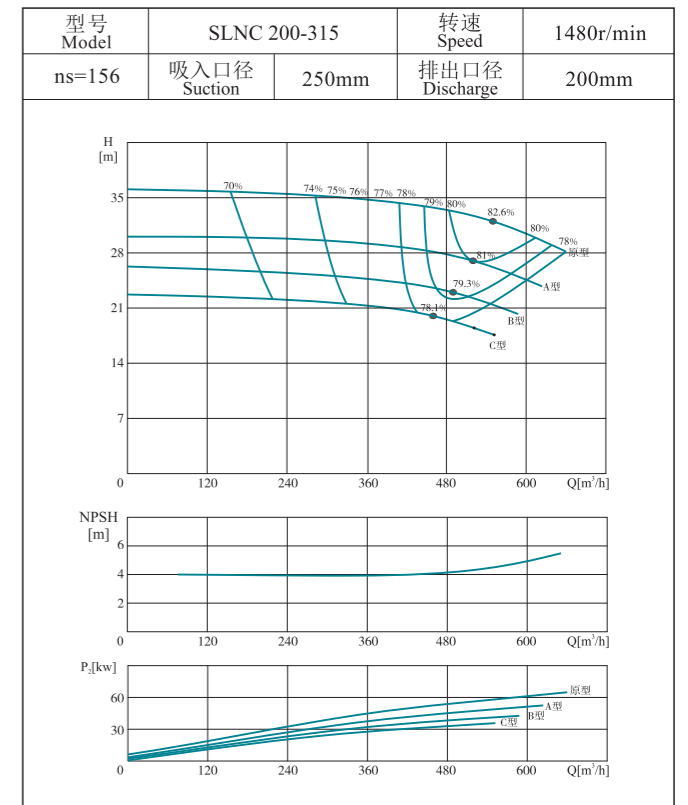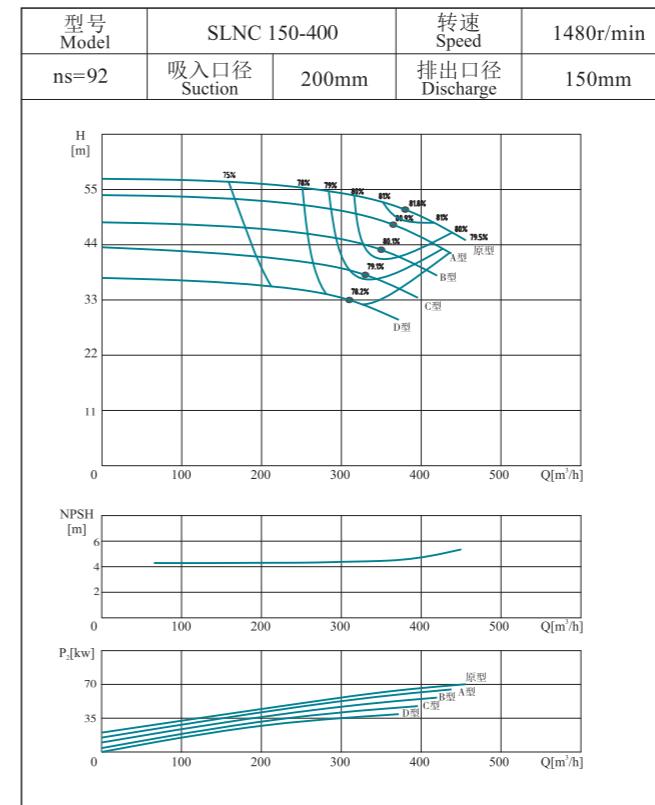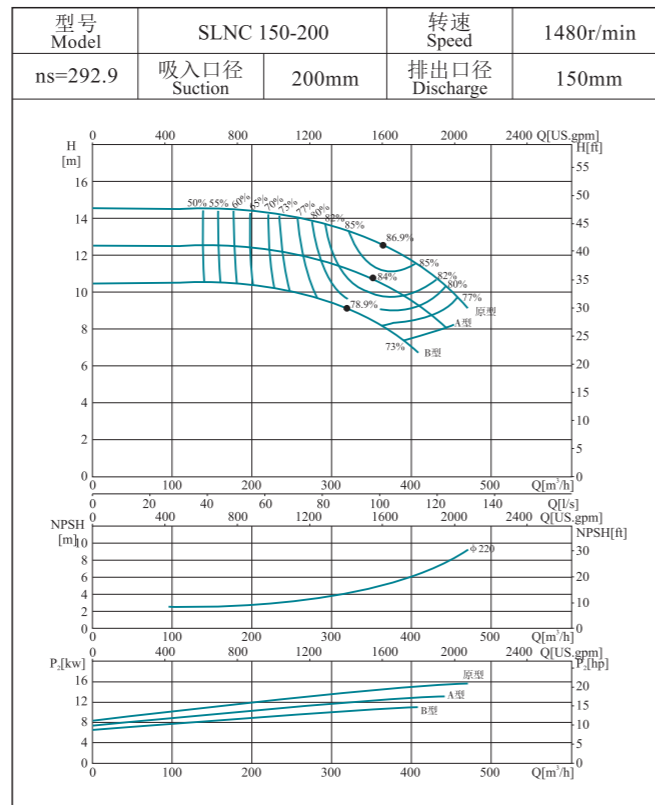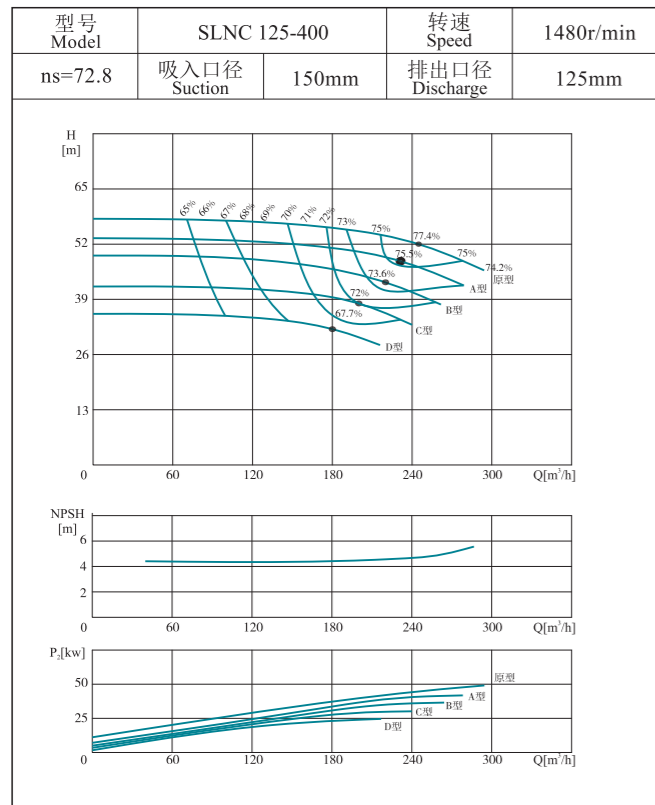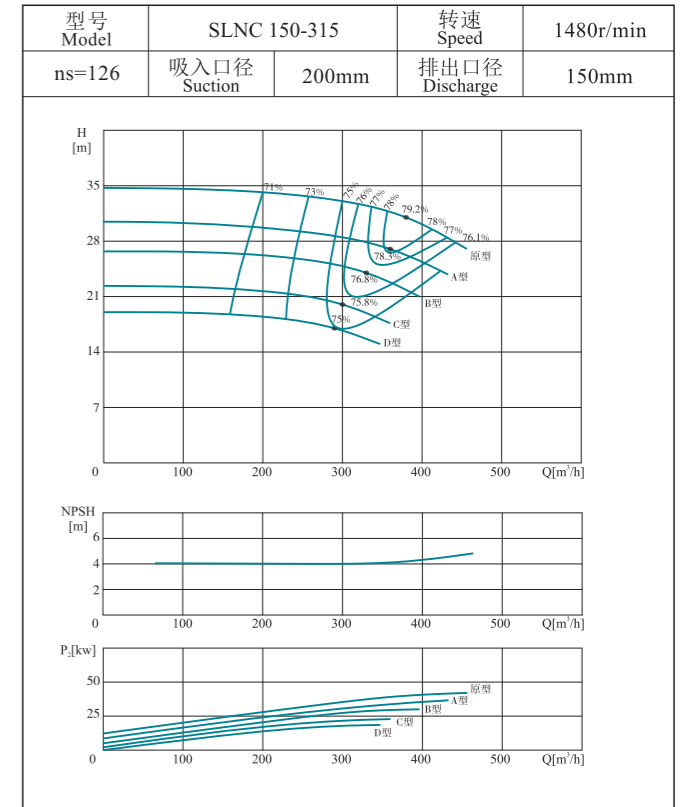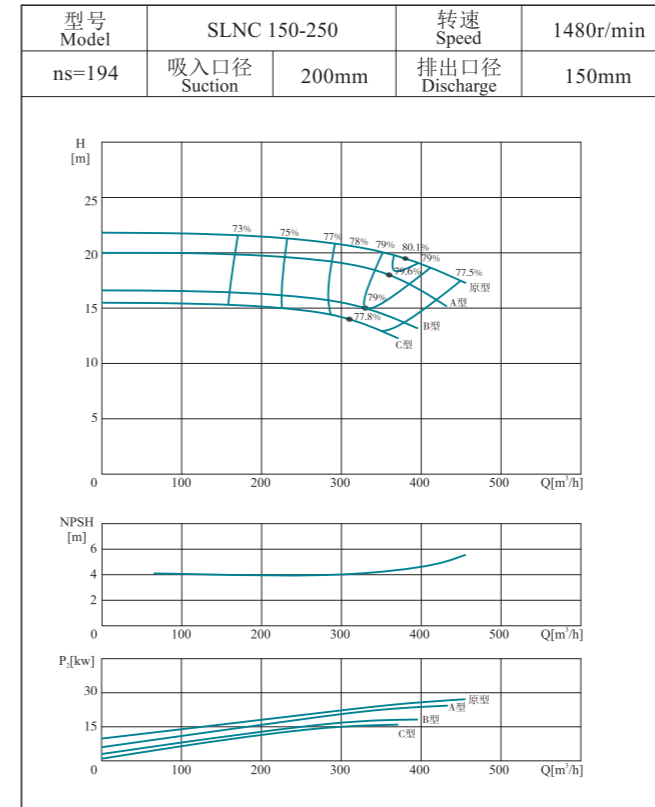



性能曲线图 Performance curve

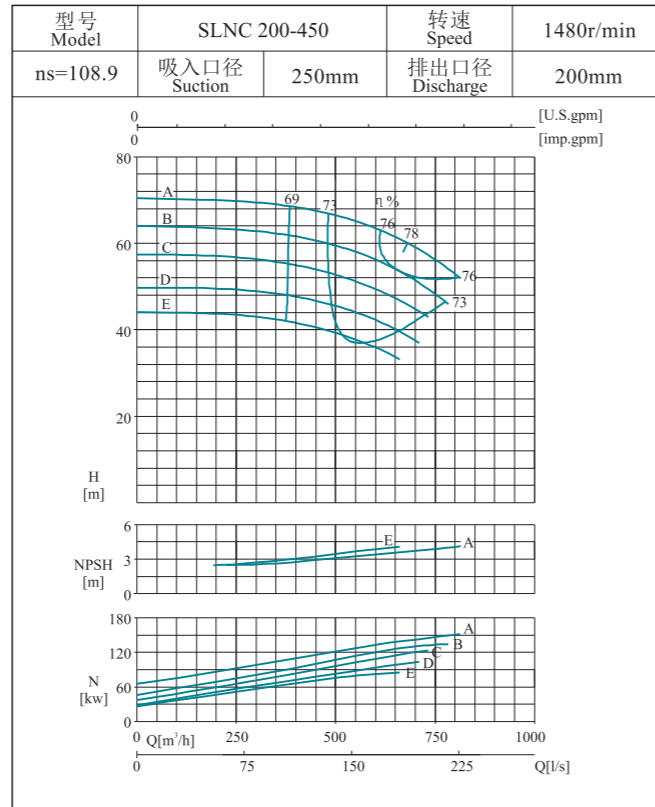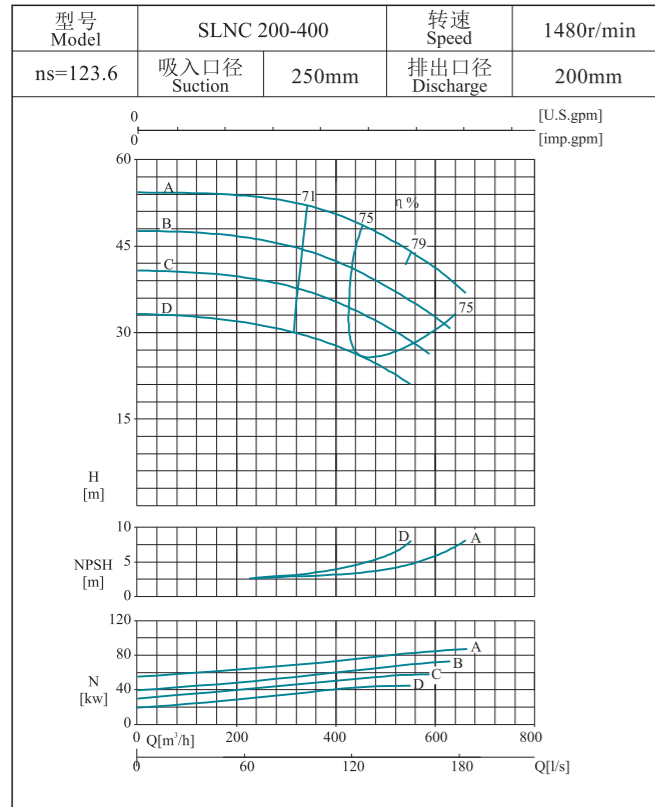




性能曲线图 Performance curve

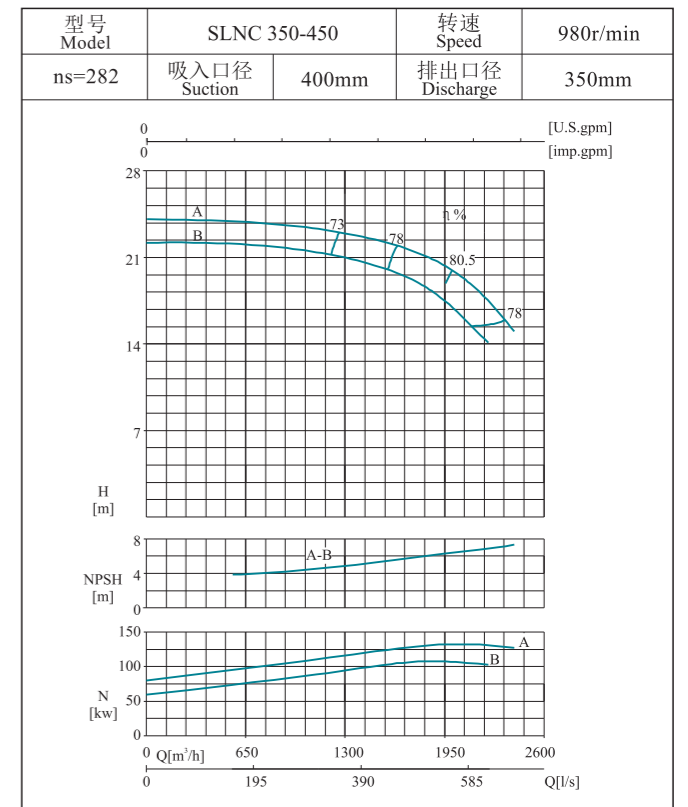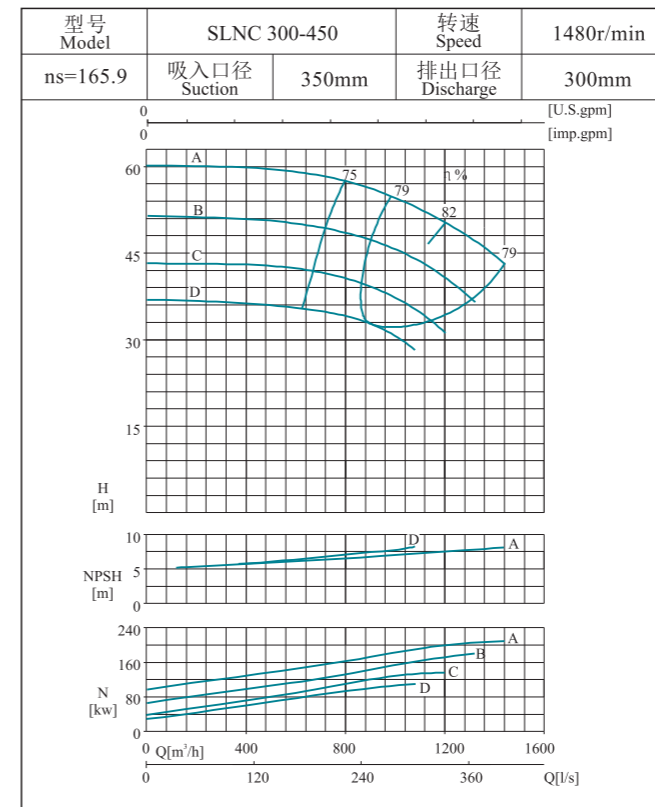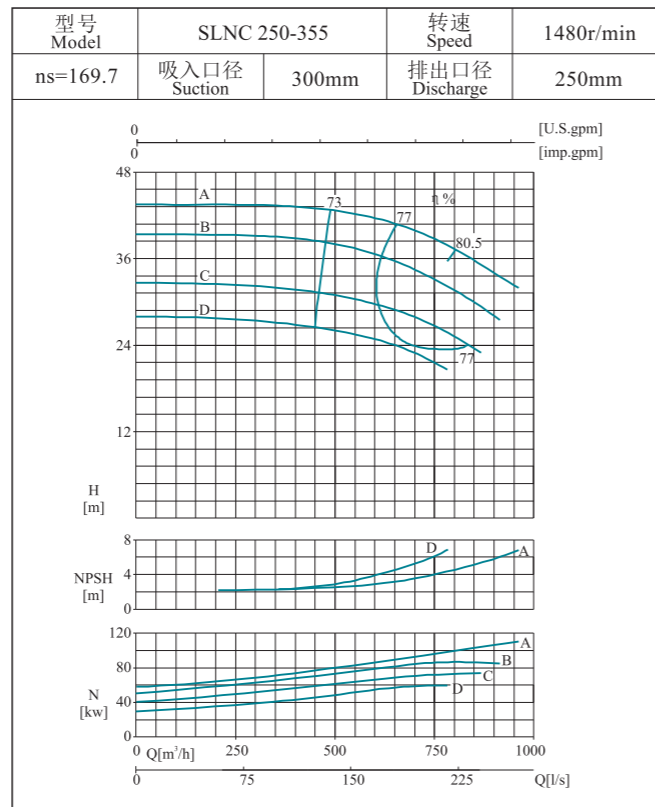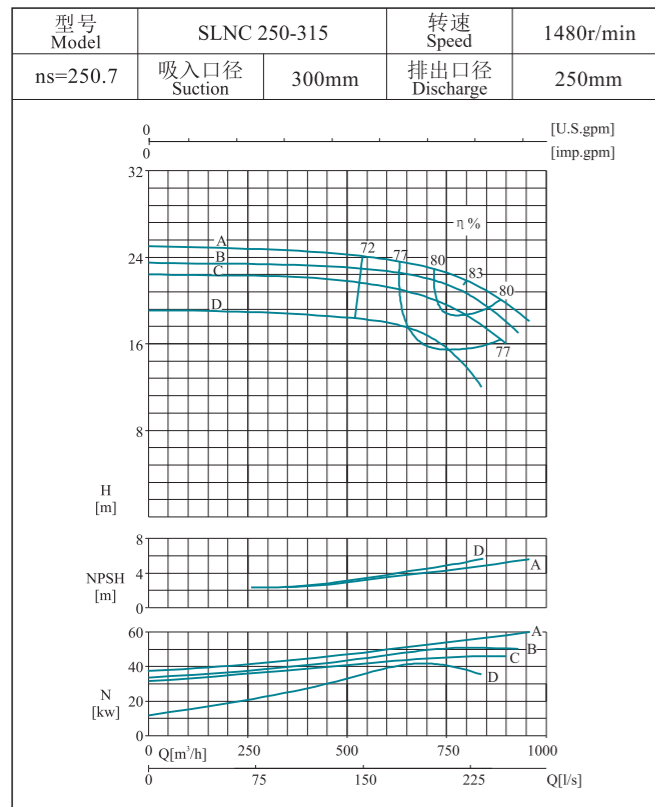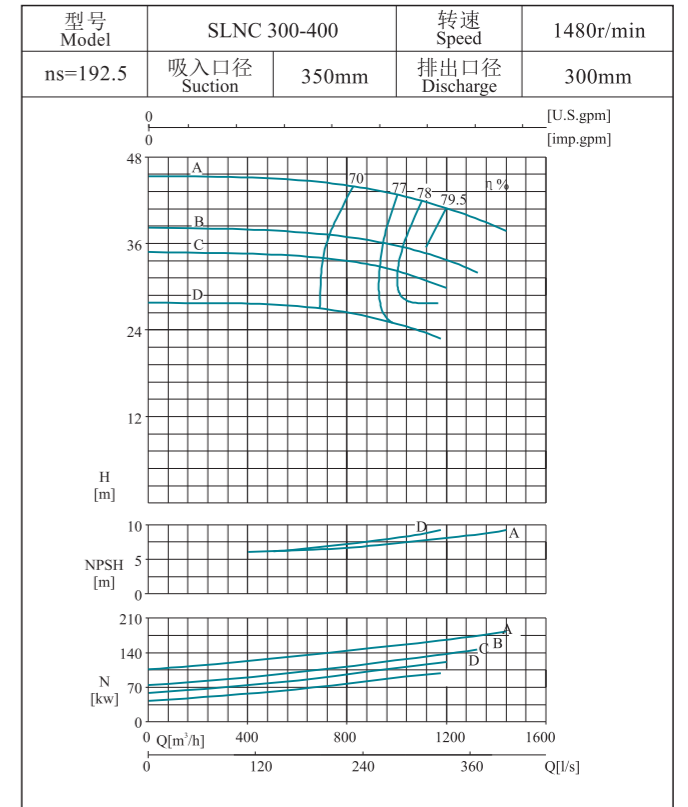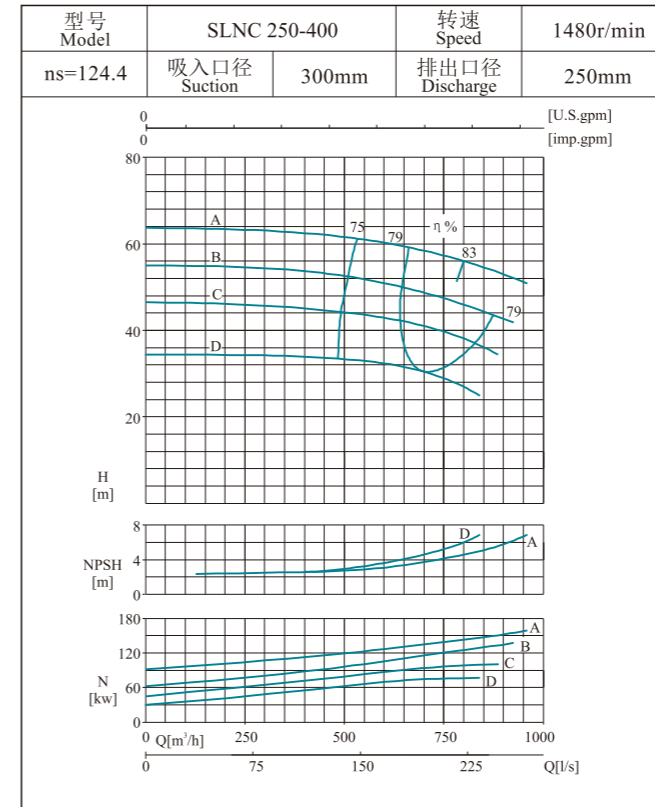

性能曲线图 Performance curve

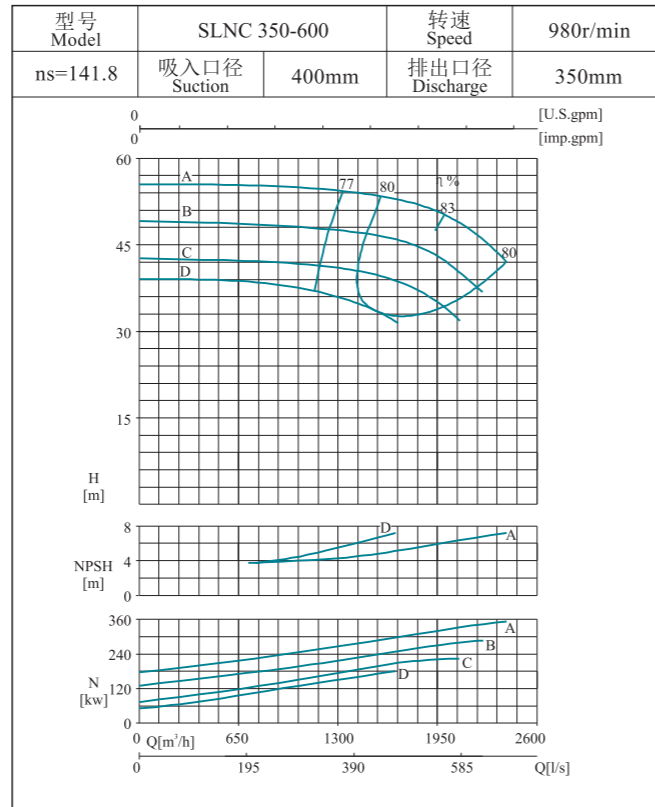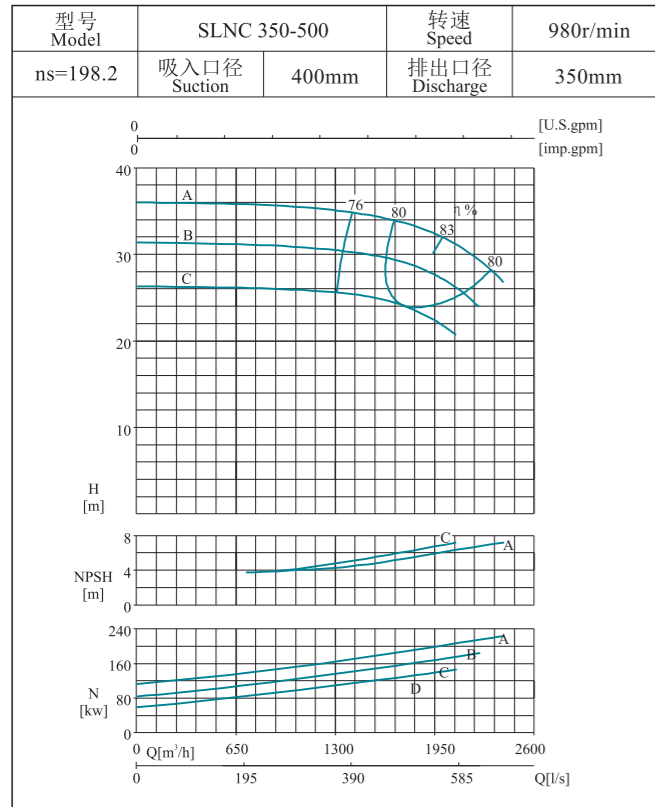

安装尺寸图 Installation dimension drawing

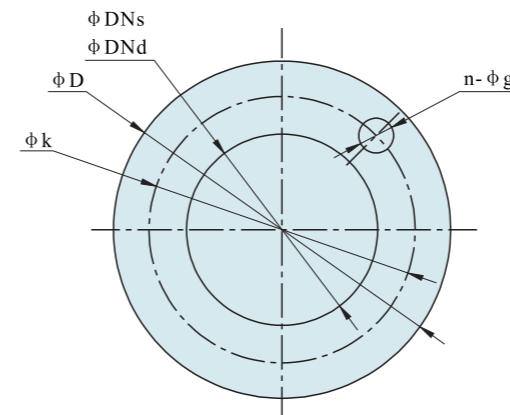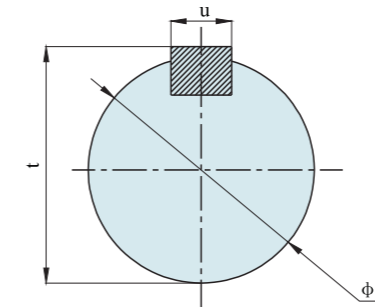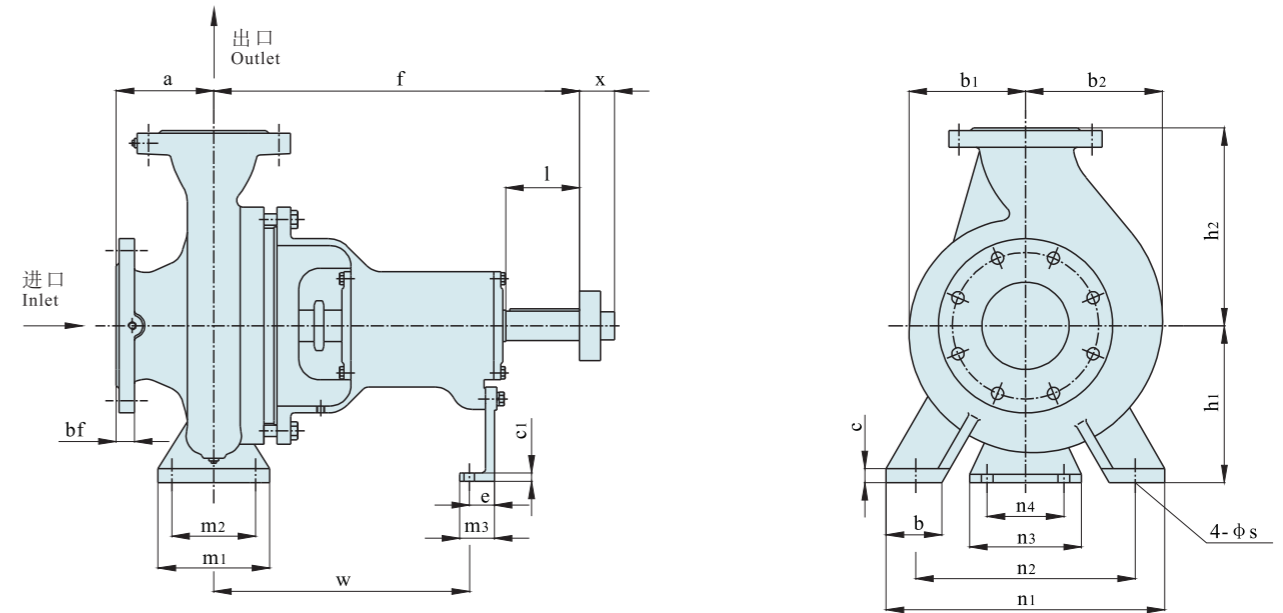

进、出口法兰
Inlet and outlet flange

| 法兰尺寸 Flange dimensions | | | | | |
|------------------------|-----|----|-----|----|----|
| DNd DNs | D | bf | k | g | n |
| 32 | 140 | 18 | 100 | 18 | 4 |
| 40 | 150 | 18 | 110 | 18 | 4 |
| 50 | 165 | 20 | 125 | 18 | 4 |
| 65 | 185 | 20 | 145 | 18 | 4 |
| 80 | 200 | 22 | 160 | 18 | 8 |
| 100 | 220 | 24 | 180 | 18 | 8 |
| 125 | 250 | 26 | 210 | 18 | 8 |
| 150 | 285 | 26 | 240 | 22 | 8 |
| 200 | 340 | 26 | 295 | 22 | 8 |
| 250 | 395 | 28 | 350 | 22 | 12 |
| 300 | 445 | 28 | 400 | 22 | 12 |
| 350 | 500 | 28 | 450 | 26 | 16 |
| 400 | 580 | 32 | 525 | 30 | 16 |

服务网络

连成在全国各大、中城市设有350多个分支机构，并建立了销售服务网络，拥有一支庞大的销售服务队伍。

Service Network

With a strong team of sales promotion and after-sales-service, Liancheng established more than 350 nationwide branches in various large and middle.

服务项目

- 技术培训
- 安装调试
- 维护修理保养
- 设备评估
- 故障处理
- 设备升级改进

Service Items

- Technical training
- Equipment evaluation
- Installation and adjustment
- Trouble-shooting
- Maintenance and repairing
- The modification & improvement of equipment

服务承诺

- 合同签约后，在安装期间本公司将派人无偿到现场协助安装及调试；
- 如您按说明书正确使用上海连成牌水泵能确保您使用满意，万一发生异常情况，即请拨打服务热线，我们将为您提供优质的售后服务，给予您满意的答复；
- 产品保修期为一年，一年之内如产品出现质量问题，本公司将实行三包；一年以后出现产品质量问题，本公司提供无偿的技术服务，需方单位自购零配件；
- 产品售出后，本公司将终生与客户保持联系，听取使用意见，以便使产品质量更加完善；
- 本公司将定期与订购单位保持联系，定期回访，以确保订购单位使用的设备运行处于良好状态。

Service Promise

After signing the contract, technical persons will be dispatched to the instant site to help install and adjust equipment, which is free of charge.

In case the equipment is manipulated in accordance with instruction of tech manual, Shanghai Liancheng will guarantee the products. If something abnormal occurred, please contact us. Shanghai Liancheng will provide consider. Within the warrant period of 1 year, if products have quality problems, Liancheng will provide charge-free services.

After warrant period, if quality problems occur, will provide the charge-free technical support, the components and parts should be bought by customers.

After the products are purchased, Shanghai Liancheng will keep lifelong contact with the customers, listening comments from customers so as to improve quality in pump performance.

Shanghai Liancheng will keep regular contact with ordering companies so as to have pump running in proper order.

境内售后服务请与我公司当地售后联系或总部：021-59136786

For the domestic post-sale service, please contact the local post-sale service and the headquarter: 021-59136786

境外销售和售后服务请联系：+86 21 59136780

For the abroad sale and post-sale service, please contact: +86 21 59136780

驻外机构：_____

Agency : _____